



Protecting bystanders around the work spot

# Catalogue 2020











### **CEPRO - PROTECTING PEOPLE AT WORK**

CEPRO develops safe setups for welding and grinding sites, to effectively protect people and the surrounding area from danger. Site safety is an indispensable part of solid operational management. In addition, we share our extensive expertise in the field of legal safety requirements with our business relations.

#### International market leader

We combine all the knowledge and expertise found in today's sector in our products, services and processes. We treat every request with due care and attention and work to tailor our solutions to the individual requirements of the client or end user. At CEPRO, we consistently invest in knowledge, training and relationships. This allows us to guarantee consistent and dependable quality and solid service in safety that complies with international regulations. It's what has made CEPRO the global market leader in its sector.

### Loyal and highly motivated employees

We don't just go for gold when it comes to safety and satisfied clients. We want the best for our own employees too. And as a result, they tend to be very happy in their jobs. This expresses itself through strong loyalty towards both CEPRO and our business partners, leading to long-term and constructive relationships. Thanks to fixed contacts, our clients and suppliers always know who they are dealing with within our firm – and are very positive about the experience.

In addition, CEPRO's employees are distinguished by their high level of flexibility. This allows them to consistently adapt to new developments in our dynamic society and develop the best possible solutions for the changing needs and wishes of our clients. What's more, these aspects – flexibility, commitment and job satisfaction – can all lead to further cost savings for our clients!

## **Protecting**









### CEPRO delivers on its promise of dependable quality and service in safety

We do so on the basis of our 6 Ps: Products, People, Protection, Profit, Pure and Planet.

- Products: We offer an extensive range of products, training programmes and services that consistently deliver the dependable quality required to set up safe welding and grinding sites in compliance with international legislation.
- People: Our employees work to gain an in-depth understanding of our clients' specific requirements, processes and wishes – and enjoy doing so.
- **Protection:** We offer employees optimal protection against welding light, noise and heat. This leads to less absence due to illness, reduced risk of fire and potential production loss as a result of damage.
- Profit: For honest business dealings, you need to be able to rely on each other and talk on an equal footing. That's why we work to honour our agreements and remain transparent at all times.
- **Pure:** Coordinating with the client is an integral part of each of our processes. The result? Clear communication.
- Planet: And as a firm, it's only logical that we treat the built-up environment in which we use this technology with due care and responsibility. That's why we have drawn up rules on how to behave and set them down in our Code of Conduct. We only work with companies that also attach strong importance to corporate social responsibility and sustainability.

# people



### TABLE OF CONTENTS

Welding light	
Welding light product information	page 6
Welding curtains	page 8
Protection curtains	page 11
Welding strips	page 12
Suspension clips & mounting strips	page 13
Accordion folding strip system	page 15
Welding sheet	page 16
Impact plate	page 17
Welding sparks and spatter	
Sparks and spatter product information	page 18
Premium welding blankets	page 20
Basic welding blankets	page 22
Economy welding blankets	page 24
Carbon felt blankets	page 25
Special blankets	page 26
Blanket accessories	page 27
Insulation products	page 28
Grinding curtains	page 29
Grinding strips	page 30
Welding screens	
Welding screens product information	page 32
Robusto welding screen	page 34
Omnium welding screen	page 38
Sprint welding screen	page 42
Gazelle welding screen	page 43

### Table of contents



### TABLE OF CONTENTS

Cable reel

Welding and grinding booths	
Booths product information	page 44
Welding booths	page 46
Grinding booths	page 48
Workplace separation	page 49
Diamond plate system information	page 50
Diamond plate system	page 51
Welding tables	page 52
Outdoor welding	
Outdoor welding product information	page 53
Welding tent	page 54
Welding umbrella	page 55
Construction	
Construction product information	page 56
Swivel arms	page 58
Poles	page 63
Rail system	page 64
Tube system	page 68

page 71

### **WELDING LIGHT**



### **WELDING LIGHT**

The main dangers of unprotected exposure to welding light are: actinic conjunctivitis (during short-term exposure), cataract (by prolonged exposure) and skin burn. The latter can also lead to skin cancer. The welder protects himself by wearing a welding mask and protective clothing but bystanders are exposed to the same dangers. This is why it is important to protect bystanders in the work place to prevent long-term illness.

When protecting the welding area, it is important not to isolate it from other work areas which is one of the reasons why a welding curtain should be made of transparent material. This not only helps to keep an overview of the work progress, but also allows for a quick response in the case of emergencies. It also prevents the welder from suffering from claustrophobia.

CEPRO offers a large range of welding light filtration products which all filter harmful welding light.



All CEPRO products have been approved according to the European EN ISO 25980 standard and are regularly retested and re-certified. Therefore customers are always assured of obtaining a safe product. The standard establishes requirements with regard to:

- Filtration of harmful ultraviolet (UV) and still visible blue light radiation.
- UV stability. This feature allows an approved CEPRO product to offer long term filtration properties.
- Flame extinction; if a CEPRO curtain catches fire, the material will extinguish automatically after the seat of the fire has been extinguished.

CEPRO products offer protection. They prevent actinic conjunctivitis, cataract, burnt skin, create a safe environment for bystanders and considerably reduce medical costs.

### Available colours

CEPRO supplies transparent welding curtains and strips in three different colours: CEPRO Orange-CE, CEPRO Bronze-CE and Cepro Green-6. These colours provide excellent filters against harmful welding light and also offer protection against irritating (not harmful) welding light.

CEPRO also supplies a Green-9 colour. Separations of this material are opaque and extremely suitable for the shielding of several separate welding work areas without causing any nuisance to other welders.

### Available products

The CEPRO range includes a large variety of products such as:

- Welding curtains for the shielding of large surfaces.
- Welding strips (2 of 3mm thick) for situations where mechanical load-bearing capacity is required.
- Suspension and mounting parts for mounting strips
- Welding sheets (1mm thick) for larger surfaces.
- Impact plate, a hard impact resistant material made of polycarbonate.

Each of these CEPRO products has been developed for use in specific working conditions for the optimal fit-out of a workplace.











### **WELDING LIGHT**













### WELDING LIGHT Welding curtains

### CEPRO WELDING CURTAINS 140CM WIDE

- Approved in accordance with EN ISO 25980
- Standard width 140cm
- Fully seamed all-around

- 7 eyelets every on one side measuring 140cm
- Snap-fasteners on both sides
- Including 7 free steel suspension rings

### CEPRO ORANGE-CE WELDING CURTAIN 140CM WIDE

H. 160cm x 140cm	16.15.16
H. 180cm x 140cm	16.15.18
H. 200cm x 140cm	16.15.20
H. 220cm x 140cm	16.15.22
H. 240cm x 140cm	16.15.24
H. 260cm x 140cm	16.15.26
H. 280cm x 140cm	16.15.28
H. 300cm x 140cm	16.15.30
Custom-made* < 10m <sup>2</sup>	16.15.99
Custom-made* > 10m <sup>2</sup>	16.15.99
*For conditions and on mode	audalna aaa naa

\*For conditions custom-made curtains see page page 9

H. 160 cm x 140cm per 10 16.15.16.0010 H. 180 cm x 140cm per 10 16.15.18.0010 H. 200 cm x 140cm per 10 16.15.20.0010







### CEPRO GREEN-9 WELDING CURTAIN 140CM WIDE

H. 160cm x 140cm	16.19.16
H. 180cm x 140cm	16.19.18
H. 200cm x 140cm	16.19.20
H. 220cm x 140cm	16.19.22
H. 240cm x 140cm	16.19.24
H. 260cm x 140cm	16.19.26
H. 280cm x 140cm	16.19.28
H. 300cm x 140cm	16.19.30
Custom-made* < 10m <sup>2</sup>	16.19.99
Custom-made* > 10m²	16.19.99
*For conditions austom made	autaina aaa n

\*For conditions custom-made curtains see page page 9

H. 160 cm x 140cm per 10	16.19.16.0010	box
H. 180 cm x 140cm per 10	16.19.18.0010	box
H. 200 cm x 140cm per 10	16.19.20.0010	box







### CEPRO GREEN-6 WELDING CURTAIN 140CM WIDE

H. 160cm x 140cm	16.16.16
H. 180cm x 140cm	16.16.18
H. 200cm x 140cm	16.16.20
H. 220cm x 140cm	16.16.22
H. 240cm x 140cm	16.16.24
H. 260cm x 140cm	16.16.26
H. 280cm x 140cm	16.16.28
H. 300cm x 140cm	16.16.30
Custom-made* < 10m <sup>2</sup>	16.16.99
Custom-made* > 10m <sup>2</sup>	16.16.99
*F	

\*For conditions custom-made curtains see page page 9

H. 160 cm x 140cm per 10	16.16.16.0010	box
H. 180 cm x 140cm per 10	16.16.18.0010	box
H. 200 cm x 140cm per 10	16.16.20.0010	box

EN ISO 25980 APPROVED





### CEPRO BRONZE-CE WELDING CURTAIN 140CM WIDE

H. 160cm x 140cm	16.17.16
H. 180cm x 140cm	16.17.18
H. 200cm x 140cm	16.17.20
H. 220cm x 140cm	16.17.22
H. 240cm x 140cm	16.17.24
H. 260cm x 140cm	16.17.26
H. 280cm x 140cm	16.17.28
H. 300cm x 140cm	16.17.30
Custom-made* < 10m <sup>2</sup>	16.17.99
Custom-made* > 10m <sup>2</sup>	16.17.99

\*For conditions custom-made curtains see page page 9

H. 160 cm x 140cm per 10	16.17.16.0010	box
H. 180 cm x 140cm per 10	16.17.18.0010	box
H. 200 cm x 140cm per 10	16.17.20.0010	box









### **CONDITIONS CUSTOM-MADE CURTAINS**

- PVC suspension eyelets every 22.5cm
- · 5cm seam all-around
- · Snap-fasteners on both vertical sides
- Minimum size supplied is 1m²
- · Minimum length supplied per side is 100cm
- Due to the elasticity of the PVC material, 2 % tolerance should be taken into account on the measurements provided
- The maximum size per curtain is approx. 24m² (connectable for larger areas)
- · Custom-made curtains are not returnable

### CEPRO WELDING CURTAINS 220CM WIDE

- Approved in accordance with EN ISO 25980
- Standard width 220cm
- Fully seamed all-around

- 11 eyelets on one side measuring 220cm
- Snap-fasteners on both sides
- Including free steel suspension rings

### CEPRO ORANGE-CE WELDING CURTAIN 220CM WIDE

H. 160cm x 220cm 18.15.16 H. 180cm x 220cm 18.15.18 EN ISO 25980 APPROVED





#### CEPRO GREEN-9 WELDING CURTAIN 220CM WIDE

H. 160cm x 220cm 18.19.16 H. 180cm x 220cm 18.19.18 EN ISO 25980 APPROVED





#### CEPRO GREEN-6 WELDING CURTAIN 220CM WIDE

H. 160cm x 220cm 18.16.16 H. 180cm x 220cm 18.16.18 EN ISO 25980 APPROVED





### CEPRO BRONZE-CE WELDING CURTAIN 220CM WIDE

H. 160cm x 220cm 18.17.16 H. 180cm x 220cm 18.17.18 EN ISO 25980 APPROVED







### WELDING LIGHT Welding curtains

### CEPRO WELDING CURTAINS EYELETS ALL AROUND

- Approved in accordance with EN ISO 25980
- Standard heigth 180cm
- Fully seamed all-around

- Suspension eyelets all around
- Including free steel suspension rings

### CEPRO ORANGE-CE WELDING CURTAIN 180CM HIGH

H. 180cm x 120cm (6'x4') 14.15.04 H. 180cm x 180cm (6'x6') 14.15.06 H. 180cm x 240cm (6'x8') 14.15.08

EN ISO 25980 APPROVED






### CEPRO GREEN-9 WELDING CURTAIN 180CM HIGH

H. 180cm x 120cm (6'x4') 14.19.04 H. 180cm x 180cm (6'x6') 14.19.06 H. 180cm x 240cm (6'x8') 14.19.08

EN ISO 25980 APPROVED





#### CEPRO GREEN-6 WELDING CURTAIN 180CM HIGH

H. 180cm x 120cm (6'x4') 14.16.04 H. 180cm x 180cm (6'x6') 14.16.06 H. 180cm x 240cm (6'x8') 14.16.08 EN ISO 25980 APPROVED





### CEPRO BRONZE-CE WELDING CURTAIN 180CM HIGH

H. 180cm x 120cm (6'x4') 14.17.04 H. 180cm x 180cm (6'x6') 14.17.06 H. 180cm x 240cm (6'x8') 14.17.08

EN ISO 25980 APPROVED





### WELDING LIGHT Welding curtains

LEADING IN WELDING SAFETY

### CEPRO WELDING CURTAINS MIXED COLOURS

- Approved in accordance with EN ISO 25980
- Standard width 150cm
- Seamed at the top and the bottom
- 7 suspension eyelets on the side measuring 150cm
- Snap-fasteners on both sides

- Including 7 free steel suspension rings
- Colour coverage from the bottom to the top: 40cm CEPRO Orange-CE, 120cm CEPRO Green-9, remainder CEPRO Orange-CE.

### CEPRO WELDING CURTAIN MIXED COLOURS

H. 160cm x 150cm	19.91.16
H. 180cm x 150cm	19.91.18
H. 200cm x 150cm	19.91.20

EN ISO 25980 APPROVED





### CEPRO PROTECTION CURTAINS 140CM WIDE

- CEPRO Yellow only provide protection against exposure to UV radiation
- Standard 140cm wide
- Fully seamed all-around

- 7 eyelets every on one side measuring 140cm
- Snap-fasteners on both sides
- Including 7 free steel suspension rings

### CEPRO YELLOW UV-CURTAIN 140CM WIDE

H. 160cm x 140cm	16.11.16
H. 180cm x 140cm	16.11.18
H. 200cm x 140cm	16.11.20



### EPRO GRINDING CURTAIN 140CM WIDE - B2 QUALITY

H. 160cm x 140cm	16.10.16
H. 180cm x 140cm	16.10.18
H. 200cm x 140cm	16.10.20
H. 220cm x 140cm	16.10.22
H. 240cm x 140cm	16.10.24
H. 260cm x 140cm	16.10.26
H. 280cm x 140cm	16.10.28
H. 300cm x 140cm	16.10.30
Custom-made < 10m <sup>2</sup>	16.10.99
Custom-made > 10m <sup>2</sup>	16.10.99

DIN 4102 - B2 APPROVED



### CEPRO GRINDING CURTAIN 140CM WIDE - B1 QUALITY

H. 160cm x 140cm	16.30.16
H. 180cm x 140cm	16.30.18
H. 200cm x 140cm	16.30.20
H. 220cm x 140cm	16.30.22
H. 240cm x 140cm	16.30.24
H. 260cm x 140cm	16.30.26
H. 280cm x 140cm	16.30.28
H. 300cm x 140cm	16.30.30
Custom-made < 10m <sup>2</sup>	16.30.99
Custom-made > 10m <sup>2</sup>	16.30.99

DIN 4102 - B1 APPROVED





### WELDING LIGHT Welding strips

### CEPRO WELDING STRIPS

- Approved in accordance with EN ISO 25980
- Standard 300mm wide
- 2mm and 3mm thickness

- Full roll 50 meters
- Available cut and punched
- Plastic suspension clips

### CEPRO ORANGE-CE WELDING STRIPS

300 x 2mm uncut per meter	26.25.02
300 x 3mm uncut per meter	26.25.03
300 x 2mm uncut per full roll	26.25.02.0050
300 x 3mm uncut per full roll	26.25.03.0050

300 x 2mm cut to size and punched 26.25.02.91 according to the CEPRO pattern minimum length 150cm 300 x 3mm cut to size and punched 26.25.03.91 according to the CEPRO pattern minimum length 150cm

EN ISO 25980 APPROVED





### CEPRO GREEN-9 WELDING STRIPS

300 x 2mm uncut per meter	26.29.02
300 x 3mm uncut per meter	26.29.03
300 x 2mm uncut per full roll	26.29.02.0050
300 x 3mm uncut per full roll	26.29.03.0050

300 x 2mm cut to size and punched 26.29.02.91 according to the CEPRO pattern minimum length 150cm 300 x 3mm cut to size and punched 26.29.03.91 according to the CEPRO pattern minimum length 150cm

EN ISO 25980 APPROVED





### CEPRO GREEN-6 WELDING STRIPS

300 x 2mm uncut per meter	26.26.02
300 x 2mm uncut per full roll	26.26.02.0050

300 x 2mm cut to size and punched 26.26.02.91 according to the CEPRO pattern minimum length 150cm

EN ISO 25980 APPROVED





### CEPRO BRONZE-CE WELDING STRIPS

 300 x 2mm uncut per meter
 26.27.02

 300 x 2mm uncut per full roll
 26.27.02.0050

300 x 2mm cut to size and punched 26.27.02.91 according to the CEPRO pattern minimum length 150cm

EN ISO 25980 APPROVED






### **WELDING LIGHT**Suspension clips for strips



### CEPRO SUSPENSION CLIPS

- Easy assembly of welding strips on a tube Ø 33.7mm
- Suitable for overlap of 5 and 10cm
- Easy to open and close on the folding line

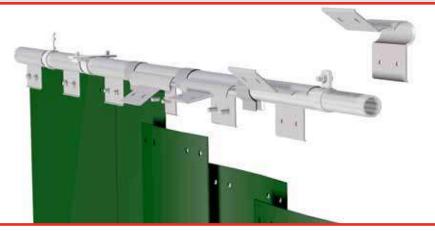


### CEPRO STANDARD SUSPENSION CLIP 20CM

Standard clip 20cm

20.11.01



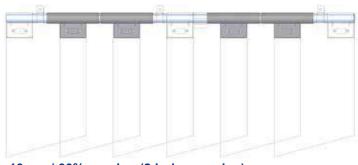

10 cm / 66% overlap (2 holes overlap)


### CEPRO SQUARE SUSPENSION CLIP 10CM

Square clip 10cm

20.11.09

Suspension clip to be used as initial clip in a separation or next to a support.



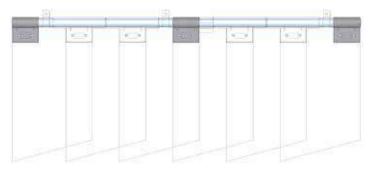

10 cm / 66% overlap (2 holes overlap)

### CEPRO FILLING PIECE 5CM

Filling piece 5cm

20.11.90

Filling piece, for overlap of 5cm or next to a support in combination with a square clip.








### WELDING LIGHT Mounting welding strips


### ■ 10cm / 66% overlap (2 holes overlap)

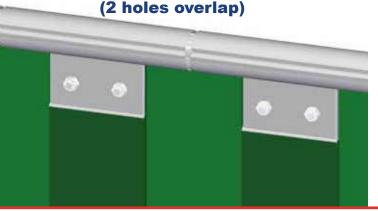

Open the clip on the folding line.



► 5cm / 33% overlap (1 hole overlap)

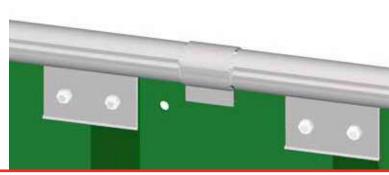

Press the clip onto the tube.




Push the bolts through both of the round holes in the middle of the clip.




A Slide the overlapping strips over the bolts. Alternately assemble the strips concavely and convexly. For a 10cm overlap use both pre-punched holes and for a 5cm overlap only use the outer holes.



**5** Close the clips and tighten the nuts and bolts.



6 If you have used a 5cm overlap then you can use the filling pieces in the openings between the clips.



### Calculation diagram for strip separations with an overlap of 100 mm (66%)

Widht separation (mm)	900	1100	1300	1500	1700	1900	2100	2300	2500	2700	2900	3100	3300	3500	3700	3900	4100	4300	4500	4700	4900	5100	5300	2200	2200	2900	6100	9300	9200
Number strips	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Number standard clips	3	4	5	6	7	7	8	9	10	11	12	12	13	14	15	16	16	17	18	19	20	20	21	22	23	24	24	25	26
Number square clips	2	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	5	5	5	5	5	6	6	6	6	6	7	7	7
Number filling pieces	2	2	2	2	2	4	4	4	4	4	4	6	6	6	6	6	8	8	8	8	8	10	10	10	10	10	12	12	12

### Calculation diagram for strip separations with an overlap of 50 mm (33%)

Widht separation (mm)	800	1050	1300	1550	1800	2050	2300	2550	2800	3050	3300	3550	3800	4050	4300	4550	4800	5050	5300	5550	5800	6050	9300	6550	9	7050	7300	7550	7800
Number strips	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Number standard clips	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Number square clips	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Number fillling pieces	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32



### **CEPRO ACCORDION FOLDING STRIP SYSTEM**

- Minimum amount of space
- Easy to operate
- Flexible in dividing the workspace



### **CEPRO SUSPENSION FOLDING STRIP SYSTEM**

Complete mounting set for folding strips system, per running meter. Including all supports for mounting the system under a ceiling.

Cepro folding strip mounting system 20.95.95


Minimum width : 130cm Maximum width : 1.000cm



### CEPRO STRIPS FOLDING STRIP SYSTEM

Complete strip set for accordion folding strip system per square meter. Thickness strips 2mm. Maximum strip height 350cm.


Cepro Orange-CE folding strip 300x2 mm system	27.55.32.10
Cepro Green-9 folding strip 300x2 mm system	27.59.32.10
Cepro Bronze-CE folding strip 300x2 mm system	27.57.32.10
Cepro Green-6 folding strip 300x2 mm system	27.56.32.10



### CEPRO STRIPS FOLDING STRIP SYSTEM

Complete strip set for accordion folding strip system per square meter. Thickness strips 3mm. Maximum strip height 250cm.

Cepro Orange-CE folding strip 300x3 mm system	27.55.33.10
Cepro Green-9 folding strip 300x3 mm system	27.59.33.10





### WELDING LIGHT Welding sheet 1mm

### CEPRO WELDING SHEET 1MM

- Approved in accordance with EN ISO 25980
- Standard 570mm wide
- 1mm thickness
- Full roll 50 meters

- 4 eyelets every on one side measuring 570mm
- Metal suspension rings included
- Packed 4 per box, working width per box 2 meters
- Supplied rolled in paper

### CEPRO ORANGE-CE WELDING SHEET 1MM

570 x 1mm, roll 50 meter length 22.15.01

Working width per box 200 cm.

570 x 1 x 1.600mm, per 4 pieces	22.15.16.0004
570 x 1 x 1.800mm, per 4 pieces	22.15.18.0004
570 x 1 x 2.000mm, per 4 pieces	22.15.20.0004
570 x 1 x 2.200mm, per 4 pieces	22.15.22.0004

EN ISO 25980 APPROVED





### CEPRO GREEN-9 WELDING SHEET 1MM

570 x 1mm, roll 50 meter length 22.19.01

Working width per box 200 cm.

570 x 1 x 1.600mm, per 4 pieces	22.19.16.0004
570 x 1 x 1.800mm, per 4 pieces	22.19.18.0004
570 x 1 x 2.000mm, per 4 pieces	22.19.20.0004
570 x 1 x 2.200mm, per 4 pieces	22.19.22.0004

EN ISO 25980 APPROVED





#### CEPRO GREEN-6 WELDING SHEET 1MM

570 x 1mm, roll 50 meter length 22.16.01

Working width per box 200 cm.

Working Water per box 200 cm.	
570 x 1 x 1.600mm, per 4 pieces	22.16.16.0004
570 x 1 x 1.800mm, per 4 pieces	22.16.18.0004
570 x 1 x 2.000mm, per 4 pieces	22.16.20.0004
570 x 1 x 2.200mm, per 4 pieces	22.16.22.0004

EN ISO 25980 APPROVED





### CEPRO BRONZE-CE WELDING SHEET 1MM

570 x 1mm, roll 50 meter length 22.17.01

Working width per box 200 cm.

570 x 1 x 1.600mm, per 4 pieces	22.17.16.0004
570 x 1 x 1.800mm, per 4 pieces	22.17.18.0004
570 x 1 x 2.000mm, per 4 pieces	22.17.20.0004
570 x 1 x 2.200mm, per 4 pieces	22.17.22.0004

EN ISO 25980 APPROVED







### **CEPRO IMPACT PLATE 3MM**

- Approved in accordance with EN ISO 25980
- Hard impact resistant material
- 3mm thickness

- Polycarbonate
- Available in custom measurements

### CEPRO IMPACT BRONZE

2050 x 1250mm, thickness 3mm 28.27.01 1025 x 1250mm, thickness 3mm 28.27.05

Impact cut to size 20.95.28.0001

EN ISO 25980 APPROVED





### CEPRO IMPACT GREEN

2050 x 1250mm, thickness 3mm 28.29.01 1025 x 1250mm, thickness 3mm 28.29.05

Impact cut to size 20.95.28.0001

EN ISO 25980 APPROVED





### **CONDITIONS CUSTOM-CUT IMPACT**

- Minimum calculated dimension 0,25m<sup>2</sup>
- Minimum length calculated is 50cm
- · Custom cut Impact is not returnable



### **CEPRO IMPACT PLATE SPECIALS**



CEPRO Impact material is also available in the colour Clear.

For more information, feel free to ask our sales department for a quotation.





### SPARKS AND SPATTER

Welding and grinding sparks are a significant issue and pose hazards for welders and co-workers in the welding and grinding workplace. Not only can sparks cause burns and thus serious personal injury to workers, but they can also cause a significant potential loss to the production process which can have a negative influence on the work of other personnel.

One of the major costs of inadequately protecting the working environment from sparks and welding spatters is damage during production which affects quality. Sparks and welding spatters pose a serious fire risk. It is not without reason that many insurers set demands for covering and shielding of flammable and / or costly materials in the vicinity of welding and grinding worksites.

Effective protection of products from welding spatter requires the use of non-combustible materials. This needs careful consideration. Specific applications and work situations often require unique solutions and customized products. Only tested and approved products should be chosen for maximum security against liability. CEPRO can provide these quality products.

CEPRO offers an extensive product package to provide shielding against sparks and welding spatters. The choice depends on the type of risk, the frequency of use, the proximity of the spark source and the different environmental factors. Products can be supplied for horizontal applications (welding blankets) or vertical solutions (curtains). Often it is also necessary and possible to supply custom made products.

#### Certification

The European standard EN 13501-1 provides the reaction to fire classification procedure for all products and building elements. According to this standard, reaction to fire is the response of a product in contributing by its own decomposition to a fire to which it is exposed, under specified conditions (not to be confused with the fire resistance).

All CEPRO welding blankets comply with the most stringent requirements for each quality. We hereby guarantee our clients a high-quality product, which will ensure a safe workplace, at all times.

For the best possible guarantee against liability, one must select products that are tested and approved according to the above mentioned standard.

#### Available products

The CEPRO range includes a large variety of products such as:


- Premium welding blankets, produced from high quality raw material.
- Basic welding blankets, all-round blankets with an excellent price quality ratio.
- Economy welding blankets, combine quality with a competive price.
- Carbon felt welding blankets, light weight, scratch free and flexible.
- Specials, door sleeves, protection covers, fire blankets
- Insulation products, welding cushions, insulation blankets and sleeves.
- Clear grinding strips and curtains.























Premium welding blankets

### CEPRO PREMIUM WELDING BLANKETS

- Approved according to the highest applicable classification within the EN 13501-1 standard
- · Suitable for horizontal and vertical use
- Produced from high-quality materials
- Suitable for high to extremely high temperatures

### OLYMPUS WELDING BLANKET

Olympus welding blanket 100 x 90cm	56.50.91
Olympus welding blanket 200 x 90cm	56.50.92
Olympus welding blanket 200 x 180cm	56.50.95
Olympus welding blanket 300 x 180cm	56.50.96
Olympus welding blanket 300 x 270cm	56.50.97
Olympus welding blanket 400 x 360cm	56.50.99
Olympus welding blanket 600 x 360cm	56.50.992

Olympus width 90cm, part of a rol 56.50.09.0900
Olympus width 90cm, full rol 50 m<sup>1</sup> 56.50.09.0950
Olympus made to size, seamed 56.50.90

### A1 - EN 13501-1 approved non-flammable

- Silica fabric (filament)
- High temperatures up to 1000 °C
- Peak temperature approx. 1300°C
- Extreme circumstances
- Suitable for horizontal use
- Material weight 1,100 gram/m²

#### HERCULES WELDING BLANKET

Hercules welding blanket 100 x 100cm	56.50.71
Hercules welding blanket 200 x 100cm	56.50.72
Hercules welding blanket 200 x 200cm	56.50.75
Hercules welding blanket 300 x 200cm	56.50.76
Hercules welding blanket 300 x 300cm	56.50.77
Hercules welding blanket 400 x 300cm	56.50.78
Hercules welding blanket 400 x 400cm	56.50.79

Hercules width 100cm, part of a rol
Hercules width 100cm, full rol 25 m<sup>1</sup>
Hercules made to size, lock stiched

56.50.07.1000
56.50.07.1025
56.50.70

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (texturized)
- 2-sided PU coating
- Temperature resistance 750°C
- Peak temperature approx. 900°C
- Suitable for horizontal use
- Material weight 1,220 gram/m²

#### SIRIUS WELDING BLANKET

56.53.21
56.53.22
56.53.25
56.53.26
56.53.27
56.53.29
56.53.02.1

Sirius width 100cm, part of a rol 56.53.02.1000 Sirius width 100cm, full rol 25 m<sup>1</sup> 56.53.02.1025

Sirius made to size, seamed 56.53.20

### A1 - EN 13501-1 approved non-flammable

- Fibreglass cloth (texturized)
- 2-sided HT coating
- Flame protection till approx. 700 °C
- Peak temperature approx. 1000°C
- Suitable for horizontal use
- Material weight 1,035 gram/m²

### THETIS WELDING BLANKET

Thetis welding blanket 200 x 100cm	56.53.82
Thetis welding blanket 200 x 200cm	56.53.85
Thetis welding blanket 300 x 200cm	56.53.86
Thetis welding blanket 300 x 300cm	56.53.87
Thetis welding blanket 400 x 300cm	56.53.88
Thetis welding blanket 400 x 400cm	56.53.89
Thetis welding blanket 600 x 400cm	56.53.892

Thetis width 100cm, part of a rol 56.53.08.1000
Thetis width 100cm, full rol 25 m<sup>1</sup> 56.53.08.1025
Thetis made to size, lock stiched 56.53.80

### A2, s2, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (texturized)
- 2-sided black graphite coating
- Temperature resistance 700°C
- Peak temperature 900°C
- Suitable for horizontal use
- Material weight 1,100 gram/m<sup>2</sup>



Premium welding blankets



### CEPRO PREMIUM WELDING BLANKETS

- Approved according to the highest applicable classification within the EN 13501-1 standard
- Suitable for horizontal and vertical use
- Produced from high-quality materials
- Suitable for high to extremely high temperatures

### ATHOS WELDING BLANKET

Athos welding blanket 200 x 200cm	56.55.15
Athos welding blanket 300 x 200cm	56.55.16
Athos welding blanket 400 x 300cm	56.55.18
Athos welding blanket 400 x 400cm	56.55.19

Athos width 100cm, part of a rol 56.55.10.1000 Athos width 100cm, full rol 25 m<sup>1</sup> 56.55.10.1025

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (texturized)
- 2-sided PU coating
- Temperature resistance 550°C
- Peak temperature approx. 900°C
- Material weight 1,120 gram/m²




### ARES WELDING BLANKET

Ares width 100cm, part of a rol 56.51.01.1000 Ares width 100cm, full rol 50 m<sup>1</sup> 56.51.01.1050

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (texturized)
- 1 sided aluminium foil
- Temperature resistance 550°C
- Radiation temperature 1.000°C
- Protection against radiation heat
- Material weight 1,060 gram/m²



### **CONDITIONS CUSTOM-MADE WELDING BLANKETS**

The specifications for custom-made welding blankets are:

- Sewn on the cut edges
- Minimum size available is 1m²
- Maximum size available is 15m²
- The minimum length per side is 100cm
- Welding blankets are made with tolerance of 2% with a maximum of 5cm on the provided measurements
- · Custom-made welding blankets are not returnable



### **PRODUCT FACT SHEETS**



For all materials product fact sheets are available with information about composition, tests etc.

Please visit our website or contact our sales department for more information.





Basic welding blankets

### CEPRO BASIC WELDING BLANKETS

- Approved according to the highest applicable classification within the EN 13501-1 standard
- Suitable for vertical use
- Excellent price-quality ratio
- All-round welding blankets

#### LETO WELDING BLANKET

Leto welding blanket 100 x 90cm	56.51.91
Leto welding blanket 200 x 90cm	56.51.92
Leto welding blanket 200 x 180cm	56.51.95
Leto welding blanket 300 x 180cm	56.51.96
Leto welding blanket 300 x 270cm $$	56.51.97

Leto width 90cm, part of a rol56.51.09.0900Leto width 90cm, full rol 50 m¹56.51.09.0950Leto made to size, seamed56.51.90

### A1 - EN 13501-1 approved non-flammable

- Silica fabric (filament)
- High temperatures up to 1000 °C
- Peak temperature approx. 1300°C
- Extreme circumstances
- Suitable for horizontal use
- Material weight 600 gram/m<sup>2</sup>

#### PALLAS WELDING BLANKET

Pallas welding blanket 100 x 100cm	56.50.41
Pallas welding blanket 200 x 100cm	56.50.42
Pallas welding blanket 200 x 200cm	56.50.45
Pallas welding blanket 300 x 200cm	56.50.46
Pallas welding blanket 300 x 300cm	56.50.47
Pallas welding blanket 400 x 300cm	56.50.48
Pallas welding blanket 400 x 400cm	56.50.49
Dellas width 100am most of a rel	EC EO 04 100
Pallas width 100cm, part of a rol	56.50.04.100
Dollag width 100cm full rol 25 ml	EG EO 04 100

Pallas width 100cm, part of a rol 56.50.04.1000
Pallas width 100cm, full rol 25 m<sup>1</sup> 56.50.04.1025
Pallas made to size, seamed 56.50.40

### A1 - EN 13501-1 approved non-flammable

- Fibreglass cloth (filament)
- · 2-sided inorganic HT coating
- Temperature resistance 700°C
- Peak temperature approx. 750°C
- Suitable for welding and grinding
- Material weight 700 gram/m²



#### ASTERIA WELDING BLANKET

Asteria welding blanket 200 x 100cm	56.53.72
Asteria welding blanket 200 x 200cm	56.53.75
Asteria welding blanket 300 x 200cm	56.53.76

Asteria width 100cm, part of a rol 56.53.07.1000 Asteria width 100cm, full rol 25 m<sup>1</sup> 56.53.07.1025 Asteria made to size, seamed 56.53.70

### A1 - EN 13501-1 approved non-flammable

- Fibreglass cloth (texturized)
- 2-sided heat treated
- Temperature resistance 550°C
- Peak temperature approx. 600°C
- Light welding and grinding work
- Material weight 580 gram/m²



### ATLAS WELDING BLANKET

Atlas welding blanket 200 x 100cm	56.50.12
Atlas welding blanket 200 x 200cm	56.50.15
Atlas welding blanket 300 x 200cm	56.50.16
Atlas welding blanket 300 x 300cm	56.50.17
Atlas welding blanket 400 x 300cm	56.50.18
Atlas welding blanket 400 x 400cm	56.50.19
A.I III 400	E0 E0 0E

Atlas width 100cm, part of a rol	56.50.05.1000
Atlas width 100cm, full rol 25 m <sup>1</sup>	56.50.05.1025
Atlas width 150cm, part of a rol	56.50.05.1500
Atlas width 150cm, full rol 50 m <sup>1</sup>	56.50.05.1550
Atlas made to size, lock stiched	56.50.10

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (filament)
- 2-sided PU-coating
- Temperature resistance 550 °C
- Peak temperature approx. 600°C
- Light welding and grinding work
- Material weight 720 gram/m²

Basic welding blankets



### CEPRO BASIC WELDING BLANKETS

- Approved according to the highest applicable classification within the EN 13501-1 standard
- Suitable for vertical use
- · Excellent price-quality ratio
- All-round welding blankets

### KRONOS WELDING BLANKET

Kronos welding blanket 200 x 100cm	56.50.62
Kronos welding blanket 200 x 200cm	56.50.65
Kronos welding blanket 300 x 200cm	56.50.66
Kronos welding blanket 300 x 300cm	56.50.67
Kronos welding blanket 400 x 300cm	56.50.68
Kronos welding blanket 400 x 400cm	56.50.69
Kronos welding blanket 600 x 400cm	56.50.692
Kronos width 100cm, part of a rol	56.50.06.1000
Kronos width 100cm, full rol 25 m <sup>1</sup>	56.50.06.1025
Kronos width 150cm, part of a rol	56.50.06.1500
Kronos width 150cm, full rol 50 m <sup>1</sup>	56.50.06.1550
Kronos made to size, seamed	56.50.60

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (filament)
- 1-sided PU-coating
- Temperature resistance 550°C
- Peak temperature approx. 600°C
- Light welding and grinding work
- Material weight 690 gram/m²



### ARGES WELDING BLANKET

Arges width 100cm, full rol 50 m<sup>1</sup> 56.59.14.1050

- Fibreglass cloth (filament)
- 2-sided neoprene rubber coating
- Temperature resistance 550°C
- Peak temperature approx. 600°C
- Oil, grease and acid resistant
- Material weight 550 gram/m<sup>2</sup>.

### **CONDITIONS CUSTOM-MADE WELDING BLANKETS**

The specifications for custom-made welding blankets are:

- Sewn on the cut edges
- Minimum size available is 1m²
- Maximum size available is 15m²
- The minimum length per side is 100cm
- Welding blankets are made with 5cm tolerance on the provided measurements
- · Custom-made welding blankets are not returnable



### **BIGGER QUANTITIES**



If you have any demand for bigger quantities in blankets or rolls, please contact our sales department for a quotation.





Economy welding blankets

### CEPRO ECONOMY WELDING BLANKETS

- Approved according to the highest applicable classification within the EN 13501-1 standard
- Suitable for vertical use
- CEPRO quality at a competitive price
- Suitable for light welding and grinding work

#### ATHENA WELDING BLANKET

Athena welding blanket 100 x 100cm	56.52.21
Athena welding blanket 200 x 100cm	56.52.22
Athena welding blanket 200 x 200cm	56.52.25
Athena welding blanket 300 x 200cm	56.52.26
Athena welding blanket 300 x 300cm	56.52.27
Athena welding blanket 400 x 400cm	56.52.29
Athena welding blanket 600 x 400cm	56.52.292
Athena width 100cm, part of a rol	56.52.02.1000
Athena width 100cm, full rol 25 m <sup>1</sup>	56.52.02.1025
Athena width 100cm, full rol 50 m <sup>1</sup>	56.52.02.1050
Athena made to size, seamed	56.52.20

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (filament)
- 2-sided PU-coating
- Temperature resistance 550°C
- Peak temperature approx. 600°C
- Light welding and grinding work
- Material weight 470 gram/m²



### APOLLO WELDING BLANKET

Apollo width 100cm, full rol 50 m<sup>1</sup> 56.50.02.1050

### A2, s1, d0 EN 13501-1 approved non-flammable

- Fibreglass cloth (filament)
- 1 sided PU-coating
- Temperature resistance 550°C
- Peak temperature approx. 600°C
- Light welding and grinding work
- Material weight 460 gram/m<sup>2</sup>



#### CETO 2 WELDING BLANKET

Ceto width 100cm, full rol 50 m<sup>1</sup> 56.52.06.1050

- Fibreglass cloth (filament)
- 2-sided silicone rubber coating
- Temperature resistance 550°C
- Peak temperature approx. 600°C
- Oil, grease and acid resistant
- Material weight 590 gram/m²

### **CONDITIONS CUSTOM-MADE WELDING BLANKETS**

The specifications for custom-made welding blankets are:

- Sewn on the cut edges
- Minimum size available is 1m²
- Maximum size available is 15m²
- The minimum length per side is 100cm
- Welding blankets are made with 5cm tolerance on the provided measurements
- Custom-made welding blankets are not returnable

Saturn welding blankets



### CEPRO SATURN WELDING BLANKETS

- Made from non-woven carbon felt
- Suitable for high temperatures
- Very flexible

- Scratch-free
- Light-weight
- Not suitable as cooling down blanket

Saturn is perfect to be put to use as an all round welding blanket, for example in the field of:

- Machine building and maintenance.
- Cutting and grinding work
- Ship maintenance
- Automotive industries

Saturn welding blankets have a very high peak temperature (1300 °C) and are relatively light-weight. Furthermore, Saturn welding blankets are very flexible and can be used in small spaces and in odd corners.

#### SATURN 420 WELDING BLANKET

Saturn 420 welding blanket 200 x 100cm 56.57.12 Saturn 420 welding blanket 200 x 200cm 56.57.15 Saturn 420 welding blanket 300 x 200cm 56.57.16

Saturn 420 width 200cm, roll length 50 m 56.57.01.2050 Saturn 420 width 200cm, roll length 10 m 56.57.01.2010 Saturn 420 width 200cm, part of a rol 56.57.01.2000

- Carbon felt
- Temperature resistance 1300°C
- Suitable for welding and grinding
- Very flexible
- Scratch-free
- Material weight 420 gram/m<sup>2</sup>



#### SATURN 200 WELDING BLANKET

Saturn 200 welding blanket 200 x 100cm 56.57.92 Saturn 200 welding blanket 200 x 200cm 56.57.95 Saturn 200 welding blanket 300 x 200cm 56.57.96

Saturn 200 width 200cm, roll length 50 m 56.57.00.2050 Saturn 200 width 200cm, roll length 10 m 56.57.00.2010 Saturn 200 width 200cm, part of a rol 56.57.00.2000

- Carbon felt
- Temperature resistance 1300°C
- Suitable for welding and grinding
- Very flexible
- Scratch-free
- Material weight 200 gram/m²



### **CEPRO SATURN WELDING BLANKETS**

H

Saturn blankets are very suitable for use in the automotive industry.





Special blankets

### **CEPRO SPECIAL BLANKETS**

### FIRE BLANKET

Fire blanket in container 120 x 120cm 53.21.12

Fire blanket in container 180 x 120cm 53.21.14

Fire blanket in container 180 x 150cm 53.21.15

Fire blanket in container 180 x 180cm 53.21.16

#### **EN 1869 APPROVED**

- Approved according to EN-1869
- Stowed away in a red container
- Fitted with an eyelet for hanging



### PROTECTION COVERS

Protection cover 200 x 200cm incl. 10 magnets, 690 gram/m<sup>2</sup>

59.06.00.0007

Protection cover 180 x 200cm 1,100 gram/m<sup>2</sup>

56.50.95

Suitable for maintenance to cars and trucks



### **DOOR SLEEVE**

Door sleeve 150 x 125cm 690 gram/m²

59.06.00.0001

- Suitable for cars and trucks
- Glass fibre (filament)
- 1 side PU coating
- Temperature resistance 550 °C
- Material weight 690 gram/m²



### SPARKS AND SPATTER Accessories



### **BLANKET ACCESSORIES**

### BRASS EYELETS Ø 12MM

Brass eyelets, pressed into the fabric 50.01.10



### VELCRO, WIDTH 25MM

Velcro, hook part, stitched with Kevlar 50.05.20.9910 Velcro, hook part, self adhesive 50.05.20.0010

Velcro, loop part, stitched with Kevlar 50.05.20.9920 Velcro, loop part, self adhesive 50.05.20.0020



### MAGNETS Ø 45MM

Magnets, seamed into fabric Ø 45 mm, thickness 9 mm

50.10.09.0045





Insulation products

### CEPRO INSULATION PRODUCTS

- Controlled cooling of hot objects to improve quality of the weld
- Prevention of injuries due to contact with hot objects
- Made from high-quality materials

### CEPRO WELDING CUSHION

50 x 50cm, thickness 8cm,

filled with glass needle mats 57.51.10.05

100 x 100cm, thickness 8cm,

filled with glass needle mats 57.51.10.10



### CEPRO INSULATION SLEEVES

100 x 50cm, for pipe diameters

from 15 to max. 28cm 57.50.10.11

150 x 50cm, for pipe diameters

from 29 to max. 44cm 57.50.10.12

200 x 50cm, for pipe diameters

from 45 to max. 61cm 57.50.10.13



### CEPRO INSULATION BLANKETS

200 x 100cm, thickness 3cm 57.50.23.10

200 x 200cm, thickness 3cm 57.50.23.20

200 x 100cm, thickness 6cm 57.50.26.10

200 x 200cm, thickness 6cm 57.50.26.20



### SPARKS AND SPATTER Grinding curtains



### **CEPRO GRINDING CURTAINS 140CM WIDE**

- Standard width 140cm
- Fully seamed all-around
- 7 eyelets on one side measuring 140cm
- Snap-fasteners on both sides
- Including 7 free steel suspension rings

### CEPRO CLEAR GRINDING CURTAINS 140CM WIDE - B2 QUALITY

H. 160 cm x 140cm	16.10.16
H. 180 cm x 140cm	16.10.18
H. 200 cm x 140cm	16.10.20
H. 220 cm x 140cm	16.10.22
H. 240 cm x 140cm	16.10.24
H. 260 cm x 140cm	16.10.26
H. 280 cm x 140cm	16.10.28
H. 300 cm x 140cm	16.10.30
Custom-made > 10m <sup>2</sup>	16.10.99
Custom-made < 10m <sup>2</sup>	16.10.99

DIN 4102 - B2 APPROVED



#### CEPRO CLEAR GRINDING CURTAINS 140CM WIDE - B1 QUALITY

H. 160 cm x 140cm	16.30.16
H. 180 cm x 140cm	16.30.18
H. 200 cm x 140cm	16.30.20
H. 220 cm x 140cm	16.30.22
H. 240 cm x 140cm	16.30.24
H. 260 cm x 140cm	16.30.26
H. 280 cm x 140cm	16.30.28
H. 300 cm x 140cm	16.30.30
Custom-made > 10m <sup>2</sup>	16.30.99
Custom-made < 10m <sup>2</sup>	16.30.99

DIN 4102 - B1 APPROVED





### **CEPRO INDUSTRIAL CURTAINS**

CEPRO Industrial curtains provide excellent protection against all kinds of industrial nuisance. They are available in various colours and with or without a see through window.

Please contact our sales department for more information about our industrial protection items.





Grinding strips

### CEPRO GRINDING STRIPS

- Widths 200, 300 and 400mm wide
- Thicknesses 2, 3 and 4mm
- Full roll 50 metres

- Available cut and punched
- Suspension with plastic suspension clip

### CEPRO GRINDING STRIPS

200 x 2mm uncut per meter	26.20.22
300 x 2mm uncut per meter	26.20.02
300 x 3mm uncut per meter	26.20.03
400 x 4mm uncut per meter	26.20.44

300 x 2mm cut to size and punched 26.20.02.91 according to the CEPRO pattern minimum length 150cm 300 x 3mm cut to size and punched 26.20.03.91 according to the CEPRO pattern minimum length 150cm



#### CEPRO GRINDING STRIPS FULL ROLLS - B2 QUALITY

200 x 2mm per full roll of 50m	26.20.22.0050
300 x 2mm per full roll of 50m	26.20.02.0050
300 x 3mm per full roll of 50m	26.20.03.0050
400 x 4mm per full roll of 50m	26.20.44.0050

DIN 4102 - B2 APPROVED



### CEPRO GRINDING STRIPS FULL ROLLS - B1 QUALITY

200 x 2mm per full roll of 50m	26.30.22.0050
300 x 2mm per full roll of 50m	26.30.02.0050
300 x 3mm per full roll of 50m	26.30.03.0050
400 x 4mm per full roll of 50m	26.30.44.0050

DIN 4102 - B1 APPROVED





### **CEPRO CLEAR STRIPS**

CEPRO Clear colourless transparent strips can also be used as protection from all kinds of external factors such as draughts, moisture, dust, cold,air, noise etc.

Please contact our sales department for a quotation.



Suspension clips for strips



### CEPRO SUSPENSION CLIPS


- Easy assembly of welding strips
- Suitable for overlap of 5 and 10 cm

### **CEPRO STANDARD SUSPENSION CLIP 20CM**

Standard clip 20cm

20.11.01



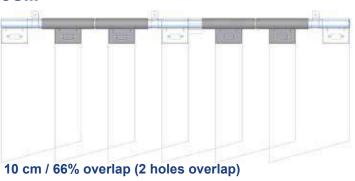


### **CEPRO SQUARE SUSPENSION CLIP 10CM**

Square clip 10cm

20.11.09

Suspension clip to be used as initial clip in a separation or next to a support.



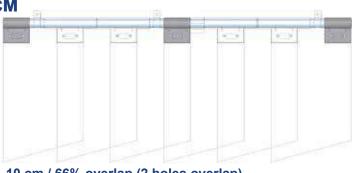

10 cm / 66% overlap (2 holes overlap)

### CEPRO FILLING PIECE 5CM

Filling piece 5cm

20.11.90

Filling piece, for overlap of 5cm or next to a support in combination with a square clip.







### **MOUNTING STRIPS**

For mounting instructions for Cepro strip separation, please see page 14.

If you have any questions or if you are in need of a quotation please contact our sales department.





### WELDING SCREENS

The main dangers of unprotected exposure to welding light are: arc eye (during short-term exposure), cataract (by prolonged exposure) and skin burn. The latter can also lead to skin cancer. The welder protects himself by wearing a welding mask and protective clothing but bystanders are exposed to the same dangers. This is why it is important to protect bystanders in the work place to prevent long-term illness.

When protecting the welding area, it is important not to isolate it from other work areas which is one of the reasons why a welding curtain should be made of transparent material. This not only helps to keep an overview of the work progress, but also allows for a quick response in the case of emergencies. It also prevents the welder from suffering from claustrophobia.

In addition to a wide-range of other products, CEPRO can also provide the necessary materials to construct a welding booth as a nonpermanent fixture.

We can also supply a mobile welding booth which is suitable and easier to move to different locations. Not only do these booths provide protection but they also offer flexibility for organizing workspace. They provide an optimal solution because they can be quickly dismantled and removed from the work floor when welding work is not being carried out.



All CEPRO products used in our welding screens have been approved according to the European EN ISO 25980 standard and are regularly retested and re-certified. Therefore customers are always assured of obtaining a safe product.

### Available products

The CEPRO welding screens programme is divided into 4 product groups which are suitable for various applications.

### CEPRO Robusto welding screens

Very high quality screens. Because they are solidly built they can be used in even the most demanding working conditions.

### CEPRO Omnium welding screens

Sturdy and stylish screens. The CEPRO Omnium welding screen is an all-round welding screen and often used in difficult working conditions.

#### . CEPRO Sprint welding screens

Are quality-made screens. The CEPRO Sprint welding screen can be used in diverse working conditions.

#### • CEPRO Gazelle welding screens

Ideal for use in smaller workspaces and infrequent use. They are very lightweight and can be easily moved by hand.





















Robusto welding screen

### CEPRO ROBUSTO WELDING SCREEN 215CM

- Height 210 cm
- Width central section 215cm
- Standard 4 swivel castors Ø 75mm
- 2 swivel castors with brake and 2 without
- RAL 7035 powder coating finish
- Round 35 x 2.5mm tube
- Rectangular 50 x 30 x 2mm tube

### CEPRO ROBUSTO WELDING SCREEN 215CM - WITH WELDING CURTAIN

Cepro Orange-CE 36.32.15

Cepro Green-9 36.32.19

Cepro Green-6 36.32.16

Cepro Bronze-CE 36.32.17

- Curtain height 180cm
- Plastic suspension rings
- Curtains EN ISO 25980 approved

EN ISO 25980 APPROVED





### CEPRO ROBUSTO WELDING SCREEN 215CM - WITH WELDING STRIPS

Cepro Orange-CE 36.32.25

Cepro Green-9 36.32.29

Cepro Green-6 36.32.26

Cepro Bronze-CE 36.32.27

- Strips height 180cm
- Strips 300 x 2mm
- Overlap strips 10cm
- Plastic suspension clips
- Strips EN ISO 25980 approved

EN ISO 25980 APPROVED





### CEPRO ROBUSTO WELDING SCREEN 215CM - SPECIALS

Cepro Atlas

heat resistant curtain 36.32.31

With Cepro Sonic

sound absorbing curtain 36.32.45

- Curtain height 180cm
- Atlas curtain 550 °C A2 EN 13501-1 approved
- Sonic curtain Rw= 14 dB



### REPLACEMENT FILLING FOR CEPRO ROBUSTO SINGLE SCREEN 215CM

Cepro Orange-CE replacement curtain	18.15.18	Cepro Orange-CE replacement strips 29.05.18.0010	
Cepro Green-9 replacement curtain	18.19.18	Cepro Green-9 replacement strips 29.09.18.0010	
Cepro Green-6 replacement curtain	18.16.18	Cepro Green-6 replacement strips 29.06.18.0010	
Cepro Bronze-CE replacement curtain	18.17.18	Cepro Bronze-CE replacement strips 29.07.18.0010	
Cepro Atlas replacement curtain	59.01.10.0003	Cepro Sonic replacement curtain 92.15.01	

### **WELDING SCREENS** Robusto welding screen



### CEPRO ROBUSTO TRIPTYCH WELDING SCREEN 355CM

- · Height 210 cm
- Width central section 215cm
- 2 swivel arms each 70cm
- Standard 4 swivel castors Ø 75mm

- 2 swivel castors with brake and 2 without
- RAL 7035 powder coating finish
- Round 35 x 2.5mm tube
- Rectangular 50 x 30 x 2mm tube

### CEPRO ROBUSTO TRIPTYCH WELDING SCREEN 355CM - WITH WELDING CURTAINS

Cepro Orange-CE 36.31.15

Cepro Green-9 36.31.19

Cepro Green-6 36.31.16

Cepro Bronze-CE 36.31.17

- Curtain height 180cm
- Plastic suspension rings
- Curtains EN ISO 25980 approved

**EN ISO 25980 APPROVED** 





### CEPRO ROBUSTO TRIPTYCH WELDING SCREEN 355CM - WITH WELDING STRIPS

Cepro Orange-CE 36.31.25

Cepro Green-9 36.31.29

Cepro Green-6 36.31.26

Cepro Bronze-CE 36.31.27

- Strips height 180cm
- Strips 300 x 2mm
- Overlap strips 10cm
- Plastic suspension clips
- Strips EN ISO 25980 approved

**EN ISO 25980 APPROVED** 





#### **CEPRO ROBUSTO TRIPTYCH WELDING SCREEN 355CM - SPECIALS**

Cepro Atlas

36.31.31 heat resistant curtain

Cepro Sonic

sound absorbing curtain 36.31.45

- Curtain height 180cm
- Atlas curtain 550 °C A2 EN 13501-1 approved
- Sonic curtain Rw= 14 dB

**EN ISO 25980 APPROVED** 



### REPLACEMENT FILLING FOR CEPRO ROBUSTO TRIPTYCH SCREEN 355CM

Cepro Orange-CE Cepro Orange-CE replacement curtain replacement strips 18.15.18.0001 29.05.18.0016

Cepro Green-9 Cepro Green-9

replacement curtain 18.19.18.0001 replacement strips 29.09.18.0016

Cepro Green-6 Cepro Green-6

18.16.18.0001 29.06.18.0016 replacement curtain replacement strips

Cepro Bronze-CE Cepro Bronze-CE

replacement curtain replacement strips 29.07.18.0016 18.17.18.0001

Cepro Atlas Cepro Sonic

replacement curtain 59.01.10.0004 replacement curtain 92.15.01



Robusto welding screen

### CEPRO ROBUSTO TRIPTYCH XL WELDING SCREEN 435CM

- · Height 210 cm
- Width central section 215cm
- 2 swivel arms each 110cm
- Standard 4 swivel castors Ø 75mm
- 2 swivel castors with brake and 2 without
- RAL 7035 powder coating finish
- Round 35 x 2.5mm tube
- Rectangular 50 x 30 x 2mm tube

### CEPRO ROBUSTO TRIPTYCH XL WELDING SCREEN 435CM - WITH WELDING CURTAINS

Cepro Orange-CE 36.31.65

Cepro Green-9 36.31.69

Cepro Green-6 36.31.66

Cepro Bronze-CE 36.31.67

- Curtain height 180cm
- Plastic suspension rings
- Curtains EN ISO 25980 approved

EN ISO 25980 APPROVED





### CEPRO ROBUSTO TRIPTYCH XL WELDING SCREEN 435CM - WITH WELDING STRIPS

Cepro Orange-CE 36.31.75

Cepro Green-9 36.31.79

Cepro Green-6 36.31.76

Cepro Bronze-CE 36.31.77

- Strips height 180cm
- Strips 300 x 2mm
- Overlap strips 10cm
- Plastic suspension clips
- Strips EN ISO 25980 approved

EN ISO 25980 APPROVED





#### CEPRO ROBUSTO TRIPTYCH XL WELDING SCREEN 435CM - SPECIALS

Cepro Atlas

heat resistant curtain 36.31.81

Cepro Sonic

sound absorbing curtain 36.31.95

- Curtain height 180cm
- Atlas curtain 550 °C A2 EN 13501-1 approved
- Sonic curtain Rw= 14 dB



### REPLACEMENT FILLING FOR CEPRO ROBUSTO TRIPTYCH XL WELDING SCREEN

Cepro Orange-CE replacement curtain 18.15.18.0002 Cepro Green-9 Cepro Green-9 Cepro Orange-CE replacement strips 29.05.18.0020

replacement curtain 18.19.18.0002 replacement strips 29.09.18.0020

Cepro Green-6 Cepro Green-6 replacement curtain 18.16.18.0002 Cepro Green-6 replacement strips 29.06.18.0020

Cepro Bronze-CE replacement curtain 18.17.18.0002 Cepro Bronze-CE replacement strips 29.07.18.0020

Cepro Atlas Cepro Sonic replacement curtain 59.01.10.0005 replacement curtain 92.15.01

# **WELDING SCREENS**Robusto welding screen



# CEPRO ROBUSTO ACCESSORIES

- Parts for Robusto screen
- Castors Ø 75 mm
- Round 35 x 2,5mm tube

#### CEPRO ROBUSTO CASTORS

Castors for Robusto screen with brake Ø 75 mm 30.04.32.01

Castors for Robusto screen without brake Ø 75 mm 30.04.32.00





#### CEPRO ROBUSTO SWIVEL ARM 70CM

Without curtains/strips	s 30.01.32.07	Without curtains/strips	s 30.01.32.07
Cepro Orange-CE curtain	30.01.32.0715	Cepro Orange-CE strips	30.01.32.0725
Cepro Green-9 curtain	30.01.32.0719	Cepro Green-9 strips	30.01.32.0729
Cepro Green-6 curtain	30.01.32.0716	Cepro Green-6 strips	30.01.32.0726
Cepro Bronze-CE curtain	30.01.32.0717	Cepro Bronze-CE strips	30.01.32.0727


#### CEPRO ROBUSTO SWIVEL ARM 110CM

Without curtains/strip	s 30.01.32.11	Without curtains/strips 30.01.32.11				
Cepro Orange-CE curtain	30.01.32.1115	Cepro Orange-CE strips	30.01.32.1125			
Cepro Green-9 curtain	30.01.32.1119	Cepro Green-9 strips	30.01.32.1129			
Cepro Green-6 curtain	30.01.32.1116	Cepro Green-6 strips	30.01.32.1126			
Cepro Bronze-CE curtain	30.01.32.1117	Cepro Bronze-CE strips	30.01.32.1127			

# CEPRO ROBUSTO SPECIAL HINGE FOR SWIVEL ARM

Special additional hinge-point for Robusto screen 30.01.32

 Suitable for positioning swivel arm parallel to the screen.

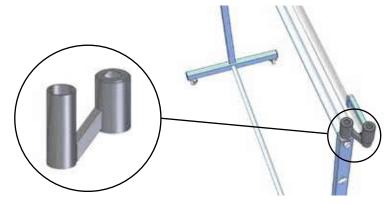



# WELDING SCREENS

Omnium welding screen

# CEPRO OMNIUM WELDING SCREEN 215CM

- Height 200 cm
- Width central section 215cm
- Standard 4 swivel castors Ø 50mm
- 2 swivel castors with brake and 2 without
- RAL 7035 powder coating finish
- Round 30 x 2mm tube
- Rectangular 40 x 30 x 2mm tube

#### CEPRO OMNIUM WELDING SCREEN 215CM - WITH WELDING CURTAIN

Cepro Orange-CE 36.34.15

Cepro Green-9 36.34.19

Cepro Green-6 36.34.16

Cepro Bronze-CE 36.34.17

- Curtain height 160cm
- Plastic suspension rings
- Curtains EN ISO 25980 approved

EN ISO 25980 APPROVED





#### CEPRO OMNIUM WELDING SCREEN 215CM - WITH WELDING STRIPS

Cepro Orange-CE 36.34.25

Cepro Green-9 36.34.29

Cepro Green-6 36.34.26

Cepro Bronze-CE 36.34.27

- Strip height 160cm
- Strips 300 x 2mm
- Overlap strips 5cm
- Plastic suspension clips
- Strips EN ISO 25980 approved

EN ISO 25980 APPROVED





#### CEPRO OMNIUM WELDING SCREEN 215CM - WITH WELDING SHEET

Cepro Orange-CE 36.34.05

Cepro Green-9 36.34.09

Cepro Green-6 36.34.06

Cepro Bronze-CE 36.34.07

- Sheet height 160cm
- Sheets 570 x 1mm
- Metal tube clamps

• Sheet EN ISO 25980 approved

EN ISO 25980 APPROVED





#### REPLACEMENT FILLING FOR CEPRO OMNIUM SINGLE SCREEN 215CM

Cepro Orange-CE replacement curtain

18.15.16

Cepro Green-9 replacement curtain

18.19.16

Cepro Green-6 replacement curtain

18.16.16

Cepro Bronze-CE replacement curtain 18.17.16

Cepro Orange-CE replacement strips 29.05.16.0008

Cepro Green-9 replacement strips 29.09.16.0008 Cepro Green-6

replacement strips 29.06.16.0008 Cepro Bronze-CE replacement strips

29.07.16.0008

Cepro Orange-CE replacement sheet 22.15.16.0004

Cepro Green-9 replacement sheet 22.19.16.0004

Cepro Green-6 replacement sheet 22.16.16.0004

Cepro Bronze-CE replacement sheet 22.17.16.0004

# WELDING SCREENS Omnium welding screen



# CEPRO OMNIUM TRIPTYCH WELDING SCREEN 375CM

- · Height 200 cm
- Width central section 215cm
- 2 swivel arms each 80cm
- Standard 4 swivel castors Ø 50mm
- 2 swivel castors with brake and 2 without
- RAL 7035 powder coating finish
- Round 30 x 2mm tube
- Rectangular 40 x 30 x 2mm tube

#### CEPRO OMNIUM TRIPTYCH WELDING SCREEN 375CM - WITH WELDING CURTAINS

Cepro Orange-CE 36.36.15

Cepro Green-9 36.36.19

Cepro Green-6 36.36.16

Cepro Bronze-CE 36.36.17

- Curtain height 160cm
- Plastic suspension rings
- Curtains EN ISO 25980 approved

EN ISO 25980 APPROVED





#### CEPRO OMNIUM TRIPTYCH WELDING SCREEN 375CM - WITH WELDING STRIPS

Cepro Orange-CE 36.36.25

Cepro Green-9 36.36.29

Cepro Green-6 36.36.26

Cepro Bronze-CE 36.36.27

- Strips height 160cm
- Strips 300 x 2mm
- Overlap strips 5cm
- Plastic suspension clips
- Strips EN ISO 25980 approved

EN ISO 25980 APPROVED





#### CEPRO OMNIUM TRIPTYCH WELDING SCREEN 375CM - WITH WELDING SHEET

Cepro Orange-CE 36.36.05

Cepro Green-9 36.36.09

Cepro Green-6 36.36.06

Cepro Bronze-CE 36.36.07

- Sheet height 160cm
- Sheets 570 x 1mm
- Metal tube clamps

• Sheet EN ISO 25980 approved

EN ISO 25980 APPROVED





#### REPLACEMENT FILLING FOR CEPRO OMNIUM TRIPTYCH SCREEN 375CM

Cepro Orange-CE replacement curtain 18.15.16.0001

18.15.16.0001

Cepro Green-9 replacement curtain 18.19.16.0001

Cepro Green-6 replacement curtain 18.16.16.0001

Cepro Bronze-CE replacement curtain 18.17.16.0001

Cepro Orange-CE replacement strips 29.05.16.0014

Cepro Green-9 replacement strips 29.09.16.0014

Cepro Green-6 replacement strips 29.06.16.0014

Cepro Bronze-CE replacement strips 29.07.16.0014

Cepro Orange-CE replacement sheet 2 x 22.15.16.0004

Cepro Green-9 replacement sheet 2 x 22.19.16.0004

Cepro Green-6 replacement sheet 2 x 22.16.16.0004

Cepro Bronze-CE replacement sheet 2 x 22.17.16.0004



# **WELDING SCREENS**

Omnium welding screen

# CEPRO OMNIUM TRIPTYCH XL WELDING SCREEN 435CM

- · Height 200 cm
- Width central section 215cm
- 2 swivel arms each 110cm
- Standard 4 swivel castors Ø 50mm
- 2 swivel castors with brake and 2 without
- RAL 7035 powder coating finish
- Round 30 x 2mm tube
- Rectangular 40 x 30 x 2mm tube

#### CEPRO OMNIUM TRIPTYCH XL WELDING SCREEN 435CM - WITH WELDING CURTAINS

Cepro Orange-CE 36.36.65

Cepro Green-9 36.36.69

Cepro Green-6 36.36.66

Cepro Bronze-CE 36.36.67

- Curtain height 160cm
- Plastic suspension rings
- Curtains EN ISO 25980 approved

EN ISO 25980 APPROVED





## REPLACEMENT CURTAIN FOR CEPRO OMNIUM TRIPTYCH XL SCREEN 435CM

Cepro Orange-CE 18.15.16.0002

Cepro Green-9 18.19.16.0002

Cepro Green-6 18.16.16.0002

Cepro Bronze-CE 18.17.16.0002

Curtain height 160cm

Curtains EN ISO 25980 approved

EN ISO 25980





#### **PRODUCT FACT SHEETS**



For all welding screens product fact sheets are available with information about dimensions, mounting etc.

Please visit our website or contact our sales department for more information.



# WELDING SCREENS Omnium welding screen



# CEPRO OMNIUM ACCESSOIRES

- Parts for Omnium screen
- Castors Ø 50mm
- Round 30 x 2mm tube

#### CEPRO OMNIUM CASTORS

Castors for Omnium screen

with brake Ø 50mm 30.04.34.01

Castors for Omnium screen

without brake Ø 50mm 30.04.34.00





#### CEPRO OMNIUM SWIVEL ARM 80CM

Without curtains/strips 30.01.34.08 Without curtains/strips 30.01.34.08

Cepro Orange-CE Cepro Orange-CE

curtain 30.01.34.0815 strips 30.01.34.0825

Cepro Green-9 Cepro Green-9

curtain 30.01.34.0819 strips 30.01.34.0829

Cepro Green-6 Cepro Green-6

curtain 30.01.34.0816 strips 30.01.34.0826

Cepro Bronze-CE Cepro Bronze-CE

curtain 30.01.34.0817 strips 30.01.34.0827

#### CEPRO OMNIUM SWIVEL ARM 110CM

Without curtains 30.01.32.11

Cepro Orange-CE

curtain 30.01.34.1115

Cepro Green-9

curtain 30.01.34.1119

Cepro Green-6

curtain 30.01.34.1116


Cepro Bronze-CE

curtain 30.01.34.1117

#### CEPRO OMNIUM SPECIAL HINGE FOR SWIVEL ARM

Special additional hinge-point for Omnium screen 30.01.32

 Suitable for positioning swivel arm parallel to the screen.

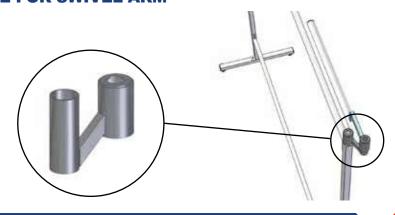



# **WELDING SCREENS**

Sprint welding screen

# CEPRO SPRINT WELDING SCREEN

- Height 193cm
- Width 192cm
- Without castors (optional)
- RAL 9005 powder coating finish

- Round galvanized 22 x 1mm tube
- Square 30 x 30 x 2mm tube

#### CEPRO SPRINT WELDING SCREEN - WITH WELDING CURTAINS

Cepro Orange-CE 36.38.15

Cepro Green-9 36.38.19

Cepro Green-6 36.38.16

Cepro Bronze-CE 36.38.17

- Curtain height 160cm
- Steel suspension rings
- Curtains EN ISO 25980 approved





#### CEPRO SPRINT WELDING SCREEN - WITH WELDING SHEET

Cepro Orange-CE 36.38.05

Cepro Green-9 36.38.09

Cepro Green-6 36.38.06

Cepro Bronze-CE 36.38.07

- Sheet height 160cm
- Sheets 570 x 1mm
- Metal tube clamps
- Sheet EN ISO 25980 approved





#### CEPRO SPRINT CASTORS

Set castors for Sprint screen 2 with brake and 2 without 30.06.34

Castors for Sprint screen

with brake Ø 50mm 30.04.34.01

Castors for Sprint screen

without brake Ø 50mm 30.04.34.00



#### REPLACEMENT FILLING FOR CEPRO SPRINT WELDING SCREEN

Cepro Orange-CE replacement curtain	18.15.16	Cepro Orange-CE replacement sheet	22.15.16.0004
Cepro Green-9 replacement curtain	18.19.16	Cepro Green-9 replacement sheet	22.19.16.0004
Cepro Green-6 replacement curtain	18.16.16	Cepro Green-6 replacement sheet	22.16.16.0004
Cepro Bronze-CE replacement curtain	18.17.16	Cepro Bronze-CE replacement sheet	22.17.16.0004

# **WELDING SCREENS**Gazelle welding screen



# CEPRO GAZELLE WELDING SCREEN

- Height 200 cm
- Width 200cm / 140cm
- Without castors
- Galvanized frame

- Round 25 x 1mm tube
- Fitted with a curtain with an open seam on the top and bottom

#### CEPRO GAZELLE WELDING SCREEN 140CM

Cepro Orange-CE 36.39.15

Cepro Green-9 36.39.19

Cepro Green-6 36.39.16

Cepro Bronze-CE 36.39.17

- Curtain height 176cm
- Fitted curtain with an open seam at the top and bottom
- Curtain EN ISO 25980 approved

EN ISO 25980 APPROVED





#### **CEPRO GAZELLE WELDING SCREEN 200CM**

Cepro Orange-CE 36.39.25

Cepro Green-9 36.39.29

Cepro Green-6 36.39.26

Cepro Bronze-CE 36.39.27

- Curtain height 176cm
- Fitted curtain with an open seam at the top and bottom
- Curtain EN ISO 25980 approved





200cm wide



# REPLACEMENT CURTAINS FOR CEPRO GAZELLE WELDING SCREEN

Cepro Orange-CE 140cm wide	13.15.04.14	Cepro Orange-CE 200cm wide	13.15.04.20
Cepro Green-9 140cm wide	13.19.04.14	Cepro Green-9 200cm wide	13.19.04.20
Cepro Green-6 140cm wide	13.16.04.14	Cepro Green-6 200cm wide	13.16.04.20
Cepro Bronze-CE		Cepro Bronze-CE	



140cm wide

#### **CEPRO GAZELLE WELDING SCREEN**

13.17.04.14

The Gazelle welding screen is designed for use in small workplaces or when the use is not very frequent. When work needs to be regularly done in different places or when flexibility in the organization of the working space is required, protection with movable screens can offer a better alternative.



13.17.04.20



# WELDING & GRINDING BOOTHS Sonic Classic

# SONIC CLASSIC

Welding and grinding operations are one of the most important noise sources in industrial working environments. Prolonged exposure to high noise concentrations can damage ear drums and cause noise-related deafness. Besides personal suffering, this often means long term absences through illness or high costs as a result of permanent disability. In less serious cases, too much noise is often the cause of loss of concentration and consequently loss of quality and lower production volumes.

The unique, compact construction of the CEPRO SONIC wall system with built-in soundproof elements not only produces sound attenuation but also effective noise reduction in the rest of the working environment. The modular system can be easily and quickly assembled (and is therefore cost-reducing), moved, expanded or changed into another configuration. The CEPRO SONIC wall system exceeds the quality and effectiveness of all other branded systems of its competitors.



All CEPRO soundproof SONIC products were extensively tested by internationally reputed testing organisations. Measurement statistics of all tests are available. The flame extinction properties of these products were also tested where necessary.

#### Available models

- · CEPRO Sonic Classic wall elements for building up a welding booth
- CEPRO Sonic Classic accessories, for further expanding your welding booth
- CEPRO Sonic Classic supports, to complete your welding booth
- CEPRO Sonic Classic grinding booths, fitted with sound absorbing roof.

#### Made to size

CEPRO can also offer you tailor made and constructed installations. This goes for dimensions, design and colour scheme. You can count on receiving professional advice from one of our advisors. Please contact our sales department to make an appointment.

#### Projects

CEPRO is a specialist in solutions for specific problems which occur in the welding and grinding work area. Sometimes these problems are isolated problems but mostly they are combinations and are part of an overall safety policy. CEPRO knows more than anybody else how to optimally combine the properties of its different products with those of others into a pleasant workplace which meets all safety and efficiency requirements. During the optimisation of a workplace we are in many cases also confronted with other issues which are important such as concerns about the evacuation of harmful welding gases, the supply of gas and oxygen, air conditioning, communication systems or even the most efficient way of supplying electricity to the workplace.

Many entrepreneurs therefore consider the involvement of CEPRO an ideal opportunity to optimise workplaces, straighten out logistics and workflow and upgrade general and technical aspects.











# WELDING & GRINDING BOOTHS Sonic Classic













# **WELDING & GRINDING BOOTHS**Sonic Classic

# **CEPRO SONIC CLASSIC WALL ELEMENTS**

- Height 2.220mm
- Width 1.012 or 512mm
- Thickness 50mm


- Standard ± 180mm free space at the bottom
- Finish in powdercoating

#### CEPRO SONIC SOUND INSULATING WALL ELEMENT

Sonic Classic wall element 1.012mm

Width 1.012mm Height 2.220mm Thickness 50mm

In green RAL 6011 45.00.00.2010 In grey RAL 7035 45.00.10.2010




#### CEPRO SONIC SOUND INSULATING WALL ELEMENT

Sonic Classic wall element 512mm

Width 512mm Height 2.220mm Thickness 50mm

In green RAL 6011 45.00.00.2005 In grey RAL 7035 45.00.10.2005




#### CEPRO SONIC SOUND INSULATING WALL ELEMENT

Sonic Classic wall element with Impact Bronze window

Width 1.012mm Height 2.220mm Thickness 50mm

In green RAL 6011 45.00.03.2010 In grey RAL 7035 45.00.13.2010




## CEPRO SONIC CONNECTING POLES

Sonic joining pole height 2.090mm

For connecting Sonic wall elements in an angle of 90° or as a cross bond. Made from square tube 50 x 50mm,

In green RAL 6011 45.20.01 In grey RAL 7035 45.20.11

Sonic joining pole extra long, for mounting fume extraction arm. 45.30.15.0001



Sonic Classic




# **► CEPRO SONIC CLASSIC ACCESSORIES**

#### **SONIC FOOT**

Sonic adjustable foot for floor mounting.

In green RAL 6011 45.10.00 In grey RAL 7035 45.10.10






#### **ADJUSTABLE FOOT SPECIAL VERSION**

For mounting a Sonic wall element directly along a wall.

RAL 6011, left version 45.10.02 RAL 6011, right version 45.10.03 RAL 7035, left version 45.10.12 RAL 7035, right version 45.10.13

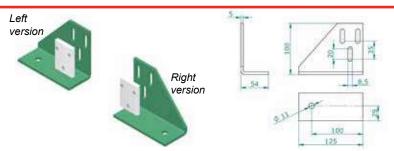


#### **EXTENSION ADJUSTABLE FOOT**

Extension for fitting an extra foot to a Sonic wall element.

The extension is galvanized.

45.35.20






#### **SUPPORT**

Support for fixing rail or tube support.

This support is galvanized.

80.10.01






#### SUPPORT, SPECIAL VERSION

Support for fixing rail or tube support to the side of a Sonic wall element.

This support is galvanized.

Left version 45.35.02 Right version 45.35.03

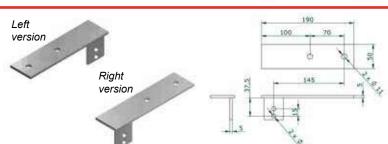


#### **SUPPORT EXTRA LONG**

Support for fixing rail or tube support, extra long version

This support is galvanized.

45.35.05

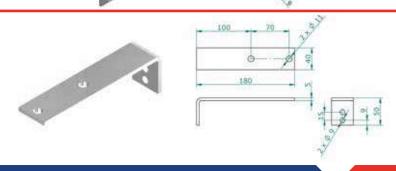



Sonic Classic grinding booths

# CEPRO SONIC CLASSIC GRINDING BOOTHS

- · Height 2500mm
- Walls are perforated on the inside only
- Thickness 50mm
- RAL 6011 powder coated

- Fitted with floor profiles
- Door fitted with an anti-panic closing


#### CEPRO SONIC CLASSIC GRINDING BOOTH

Width 2.124mm Depth 2.124mm Height 2.552mm

The elements are perforated on the inside only. The booth is fitted with a sound insulating door, which is provided with an anti-panic closing on the inside and a door catch on the outside.

CEPRO grinding booths are standard finished in powder coating, colour green RAL 6011. The color of the door is RAL 9006.

46.05.22

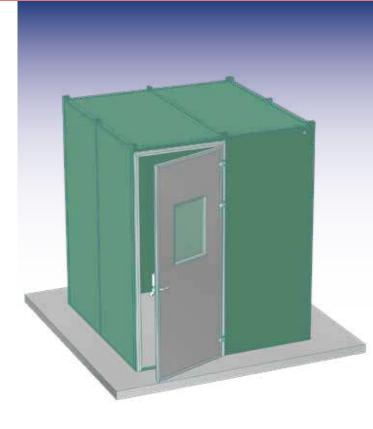


#### CEPRO SONIC CLASSIC GRINDING BOOTH

Width 3.136mm Depth 2.124mm Height 2.552mm

The elements are perforated on the inside only. The booth is fitted with a sound insulating door, which is provided with an anti-panic closing on the inside and a door catch on the outside.

CEPRO grinding booths are standard finished in powder coating, colour green RAL 6011. The color of the door is RAL 9006.

46.05.23

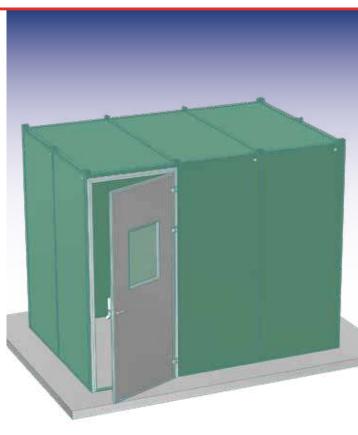

Workplace separation



# CEPRO WORKPLACE SEPARATION

#### SONIC SOUND INSULATING SCREEN

Height 2.208mm Width 2.124mm Thickness 50mm

This screen is made of two Sonic elements which are placed in a movable frame. In this way you will have utmost flexibility in shielding the source of noise in your workplace.

Movable on four heavy duty castors (100mm  $\emptyset$ ) with brake, finished in powder coating green RAL 6011.

46.30.00.2221



#### SONIC SOUND ABSORBING CURTAIN

A sound absorbing curtain which offers protection against noise nuisance. Fitted on the top side with metal eyelets.

Only available as a custom curtain. Maximum width 150cm, separate curtains to be connected with a Velcro closure. One side mesh and one side PVC coated fabric. Per square meter.

92.15.01



(fitted in Cepro Robusto screen)



Workplace separation - Diamond rigid sheet system

## **DIAMOND RIGID SHEET SYSTEM**

CEPRO diamond rigid sheets are developed to separate the workplace in general. For example, they can be used to shield parts of the workplace from view. You can also create a physical barrier between a production area and the rest of the workplace.

#### Available models

- CEPRO Diamond rigid sheet wall elements for building up a booth or separation
- CEPRO Diamond rigid sheet accessories, for further expanding your booth or separation
- CEPRO Diamond rigid sheet supports, to complete your booth or separation

#### Technical information

- CEPRO Diamond rigid sheet products are meant for use indoors
- The nuts and bolts used to connect the frame should be checked regularly
- CEPRO Diamond rigid sheet booths and separations are delivered with a clear mounting instruction

#### Made to size

CEPRO can also offer you tailor made and constructed installations. This goes for dimensions, design and colour scheme. You can count on receiving professional advice from one of our advisors. Please contact our sales department to make an appointment.

#### Projects

CEPRO is a specialist in solutions for specific problems which occur in the welding and grinding work area. Sometimes these problems are isolated problems but mostly they are combinations and are part of an overall safety policy. CEPRO knows more than anybody else how to optimally combine the properties of its different products with those of others into a pleasant workplace which meets all safety and efficiency requirements. During the optimisation of a workplace we are in many cases also confronted with other issues which are important such as concerns about the evacuation of harmful welding gases, the supply of gas and oxygen, air conditioning, communication systems or even the most efficient way of supplying electricity to the workplace.

Many entrepreneurs therefore consider the involvement of CEPRO an ideal opportunity to optimise workplaces, straighten out logistics and workflow and upgrade general and technical aspects.











Workplace separation - Diamond rigid sheet system



#### CEPRO DIAMOND RIGID SHEET SYSTEM


- Height 2.000mm
- Width 940 or 440mm
- Thickness 30mm

- Standard ± 150mm free space at the bottom
- RAL 7035 powder coated

## CEPRO DIAMOND PLATE WALL ELEMENT

Diamond plate wall element
Width 940mm
Height 2.000mm
Thickness 30mm


45.70.01.2010



#### CEPRO DIAMOND PLATE WALL ELEMENT

Diamond plate wall element
Width 440mm
Height 2.000mm
Thickness 30mm

45.70.01.2005




#### CEPRO DIAMOND PLATE WALL ELEMENT

Diamond plate wall element with Impact window

Width 940mm Height 2.000mm Thickness 30mm

45.70.03.2010



#### CEPRO DIAMOND PLATE ACCESORIES

Joining pole height 2.160mm

For connecting Diamond plate elements together. You must start and end each element with a support.

Made from square tube 40x40x2mm.

45.70.20.2160

Joining pole height 2.160mm

For use at the end of a sequence of Diamond plate elements to give more stability. Made from square tube 100x40x2mm,

45.70.21.2160

Diamond plate foot support, to be mounted on 2 sides of each support 45.70.10





Welding tables

## CEPRO WELDING TABLES

- Height 80cm
- Made from profiles 40 x 40mm
- · Available with grill top and/or bricks
- RAL 6011 powder coated

#### WELDING TABLE WITH GRILL TOP AND BRICKS

Welding table with grill top and bricks width 85cm 45.41.01.6385

Welding table with grill top and bricks width 110cm 45.41.01.6311

- Height 80cm
- Depth 63cm
- Bare metal grill top
- Fire proof bricks



#### WELDING TABLE WITH GRILL TOP

Welding table with grill top

width 60cm 45.41.02.6360

Welding table with grill top

width 85cm 45.41.02.6385

Welding table with grill top

width 110cm 45.41.02.6311

- Height 80cm
- Depth 63cm

• Bare metal grill top



#### ACCESORIES WELDING TABLE WITH GRILL TOP AND BRICKS

Fire proof bricks 45.49.01.0001

Support plate for bricks

45.49.01.0002

Grill top (bare metal) 620 x 590 mm for welding table with grill and bricks 63 x 85 cm for welding table with grill 63 x 60 cm 45.49.02.6259

Grill top (bare metal) 620 x 840 mm for welding table with grill and bricks 63 x 110 cm for welding table with grill 63 x 85 cm 45.49.02.6284

Grill top (bare metal) 620 x 1190 mm for welding table with grill 63 x 110 cm 45.49.02.6209

Support for fixing objects to welding table 45.49.50.0001







# **OUTDOOR WELDING**



# **OUTDOOR WELDING**

When welding in the open air it is important to be protected from all kinds of weather, such as rain, wind, sun, etc. Working conditions are noticeably improved if a welding tent or welding umbrella is used. This level of protection for the welder has proved to contribute to a reduction in sick leave.

#### Available products

The CEPRO outdoor welding program is divided into 2 product groups which are suitable for various applications.

#### CEPRO welding tents

Our welding tents are extremely suitable for work in the open air. Work can be continued for longer periods and due to the improvement of working conditions, sick leave will be greatly reduced.

#### • CEPRO welding umbrellas

Our welding umbrellas are specially designed for working outdoors. They provide reliable temporary protection of the work site from sun or rain.













# **OUTDOOR WELDING**

Welding tents

#### CEPRO WELDING TENTS

- Approved to the M-1 standard
- PVC fabric 570 gr/m<sup>2</sup>
- Protection skirt 200mm all-around
- Front and back can be closed with a rope-lock

## CEPRO WELDING TENT CUBE MODEL

Welding tent cube model

200 x 190cm 91.20.11

Cover welding tent cube model

200 x 190cm 90.20.11

Frame welding tent cube model

200 x 190cm 90.20.02

- Width 190cm
- Depth 200cm
- Height 200cm
- Ridge height 220cm
- Frame Ø 25mm galvanized
- Packing suitable for parcel service



#### CEPRO WELDING TENT CUBE MODEL XL

Welding tent cube model XL

300 x 190cm 91.20.19

Cover welding tent cube model XL 300 x 190cm 90.20.19

Extension for standard frame welding tent cube model

300 x 190cm 90.20.09

Only available in combination with article 90.20.02

- Width 190cm
- Depth 300cm
- Height 200cm
- Ridge height 220cm
- Frame Ø 25mm galvanized
- Packing suitable for parcel service



#### CEPRO WELDING TENT HEAVY DUTY MODEL XL

Welding tent heavy duty XL model

300 x 200cm

91.20.20.3020

Cover welding tent heavy duty XL model 300 x 200cm 90.20.20.3020

Frame welding tent heavy duty XL model

300 x 200cm on request

- Width 200cm
- Depth 300cm
- Height 200cm
- Ridge height 220cm
- Frame Ø 33.7mm galvanized
- Including hoisting loops



#### CEPRO WELDING TENT HEAVY DUTY MODEL XXL

Welding tent heavy duty XXL model

300 x 300cm

91.20.20.3030

Cover welding tent heavy duty XXL model

300 x 300cm

90.20.20.3030

Frame welding tent heavy duty XXL model 300 x 300cm on request

- Width 300cm
- Depth 300cm
- Height 200cm
- Ridge height 220cm
- Frame Ø 33.7mm galvanized
- Including hoisting loops



# OUTDOOR WELDING

Welding umbrellas



# **CEPRO WELDING UMBRELLAS**

- Flame retardant and water repellent canvas
- Canvas fabric 280 gr/m<sup>2</sup>
- Colour green

- Carrying bag included
- Windbreaker on the top side

#### WELDING UMBRELLA MEDIUM DUTY

Welding umbrella medium duty Ø 220cm 93

- 93.21.20
- Ø 220cm
- With tilt mechanisme
- 10 ribs, length 110cm
- Mast Ø 28mm
- Mast in 2 parts, total heigth 220cm
- Ends of the ribs are fitted with caps



# WELDING UMBRELLA HEAVY DUTY

Welding umbrella heavy duty Ø 300cm 93.71.20

- Ø 300cm
- Fitted with crank system
- 8 ribs, length 150cm
- Mast Ø 38mm
- Mast in 2 parts, total heigth 220cm
- Ends of the ribs are fitted with metal caps
- Groundpin included



#### CONSTRUCTION



#### CONSTRUCTION

CEPRO offers an extensive range of swivel arms, columns and poles and construction parts making it possible to combine a wide variety of protection items and booths. CEPRO swivel arms, columns and poles and construction parts are characterized by their excellent quality and ease of use. You can find the appropriate arm, column or pole and its related supports and mounting parts for each application. We are ready to meet your special requirements. Please consult our sales department.

#### Available products

The CEPRO range includes a large variety of products such as:

- Pipe swivel arm
- · Modular swivel arm
- Swivel heavy duty arm
- Swivel joint arm
- Poles and columns
- Rail and tube system parts
- · Cable reel

Each of these CEPRO products has been developed for use in specific working conditions for the optimal fit-out of a workplace.

#### Made to size

CEPRO can also offer you tailor made and constructed installations. This goes for dimensions, design and colour scheme. You can count on receiving professional advise from one of our advisors. Please contact our sales department to make an appointment.

#### Projects

CEPRO is a specialist in solutions for specific problems which occur in the welding and grinding work area. Sometimes these problems are isolated problems but mostly they are combinations and are part of an overall safety policy. CEPRO knows more than anybody else how to optimally combine the properties of its different products with those of others into a pleasant workplace which meets all safety and efficiency requirements. During the optimisation of a workplace we are in many cases also confronted with other issues which are important such as concerns about the evacuation of harmful welding gases, the supply of gas and oxygen, air conditioning, communication systems or even the most efficient way of supplying electricity to the workplace.












# CONSTRUCTION



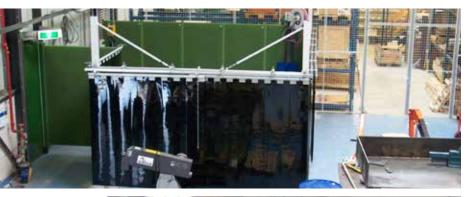








# **CONSTRUCTION**Swivel arms

## CEPRO SWIVEL ARMS

#### CEPRO PIPE SWIVEL ARM 200CM

Maximum length 2 meter, produced from tube of  $35mm \varnothing$ . This product is finished with a grey (RAL 7035) powder-coating. Fitted with a mechanical hinge and an assembly plate for fixing the arm against a wall or column.

82.10.15



- 1. Choose the type of separation; curtains or strip (2 or 3 mm)
- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation. Details on page 63.

	Curtain			St	Strips 300 x 2 mm			Strips 300 x 3 mm		
82.10.15	Heigth under beam			Heigth under beam			Heigth under beam			
Swivel arm	1,85 mtr	2,10 mtr	2,60 mtr	1,85 mtr	2,10 mtr	2,60 mtr	1,85 mtr	2,10 mtr	2,60 mtr	
length 200cm	83.10.01.0225 50x50x2mm H=2,25 mtr	83.10.01.0250 50x50x2mm H=2,50 mtr	83.10.01.0300 50x50x2mm H=3,00 mtr	83.10.01.0225 50x50x2mm H=2,25 mtr	83.10.02.0250 80x80x3mm H=2,50 mtr	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0225 80x80x3mm H=2,25 mtr	83.10.02.0250 80x80x3mm H=2,50 mtr	on request	

#### CEPRO SWIVEL ARM 200CM

Maximum length 2 meter, produced from rectangular tube of  $50 \times 50 \text{mm}$ . This product is finished with a grey (RAL 7035) powder-coating. Fitted with a mechanical hinge and an assembly plate for fixing the arm against a wall or column.

82.10.36.0200



- 1. Choose the type of separation; curtains or strip (2 or 3 mm)
- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation. Details on page 63.

	Curtain			St	Strips 300 x 2 mm			Strips 300 x 3 mm		
82.10.36	Heigth under beam			Heigth under beam			Heigth under beam			
Swivel arm	2,15 mtr	2,30 mtr	2,80 mtr	2,15 mtr	2,30 mtr	2,80 mtr	2,15 mtr	2,30 mtr	2,80 mtr	
length 200cm	83.10.02.0225 80x80x3mm H=2,25 mtr	83.10.02.0250 80x80x3mm H=2,50 mtr	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0225 80x80x3mm H=2,25 mtr	83.10.02.0250 80x80x3mm H=2,50 mtr	83.10.02.0300 80x80x3mm H=3,00 mtr	83.20.02.0225 100x100x4mm H=2,25 mtr	83.20.01.0250 100x100x4mm H=2,50 mtr	83.20.01.0300 100x100x4mm H=3,00 mtr	



# **CEPRO SWIVEL ARMS**

#### CEPRO MODULAR SWIVEL ARM

Produced from a rectangular tube  $50 \times 50$ mm. This product is finished with a grey (RAL 7035) powder-coating. The swivel arm is fitted with a brake system and an assembly plate for fixing the arm against a wall or column.

200cm version	82.10.30.0200
300cm version	82.10.30.0300
400cm version	82.10.30.0400
500cm version	82.10.30.0500



- 1. Choose the type of separation; curtains or strip (2 or 3 mm)
- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation.

	Curtain			Strips 300 x 2 mm			Strips 300 x 3 mm		
	Heigth under beam			Heigth under beam			Heigth under beam		
	2,20 mtr	2,70 mtr	3,20 mtr	2,20 mtr	2,70 mtr	3,20 mtr	2,20 mtr	2,70 mtr	3,20 mtr
82.10.30.0200 swivel arm length 200cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.10.02.0400 80x80x3mm H=4,00 mtr	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.20.01.0400 100x100x4mm H=4,00 mtr	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.01.0350 100x100x4mm H=3,50 mtr	83.20.01.0400 100x100x4mm H=4,00 mtr
82.10.30.0300 swivel arm length 300cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.10.02.0400 80x80x3mm H=4,00 mtr	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.01.0350 100x100x4mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr
82.10.30.0400 swivel arm length 400cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.10.02.0400 80x80x3mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	on request	op aanvraag
82.10.30.0500 swivel arm length 500cm	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.01.0350 100x100x4mm H=3,50 mtr	83.20.01.0400 100x100x4mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	on request	on request	on request	on request

#### CEPRO SWIVEL ARM HEAVY DUTY 600CM

Swivel arm, maximum length 6 meter, girder made from rectangular tube  $50 \times 50$ mm. This arm is fitted with a hinge in a block bearing with and a mechanical lock. An assembly plate for fixing the arm to a column or pole is included.

82.10.45.0600

- 1. Choose the type of separation; curtains or strip (2 or 3 mm)
- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation. Details on page 63.

	Curtain			Strips 300 x 2 mm			Strips 300 x 3 mm		
82.10.45	Heigth under beam			Heigth under beam			Heigth under beam		
Swivel arm	2,05 mtr	2,55 mtr	3,05 mtr	2,05 mtr	2,55 mtr	3,05 mtr	2,05 mtr	2,55 mtr	3,05 mtr
length 600cm	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.03.0300 160x160x6mm H=3,00 mtr	83.20.03.0350 160x160x6mm H=3,50 mtr	83.20.03.0400 160x160x6mm H=4,00 mtr	on request	on request	on request

# CONSTRUCTION

Swivel arms

# CEPRO SWIVEL ARMS

#### CEPRO SWIVEL ARM HEAVY DUTY HINGED 600CM

Swivel arm, 6 meter (4 + 2 meters), made with a double girder  $50 \times 50$  mm. This first part swivels in a block bearing and has a mechanical lock. The second part has an adjustable brake system. This part has a maximum radius of  $2 \times 112^{\circ}$ . An assembly plate for fixing the arm to a column or pole is included.

82.10.50.0600


- 1. Choose the type of separation; curtains or strip (2 or 3 mm)
- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation. Details on page 63.

	Curtain			St	Strips 300 x 2 mm			Strips 300 x 3 mm		
82.10.50	Heigth under beam			Heigth under beam			Heigth under beam			
Swivel arm	2,05 mtr	2,55 mtr	3,05 mtr	2,05 mtr	2,55 mtr	3,05 mtr	2,05 mtr	2,55 mtr	3,05 mtr	
length 600cm	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.03.0350 160x160x6mm H=3,50 mtr	83.20.03.0400 160x160x6mm H=4,00 mtr	83.20.03.0300 160x160x6mm H=3,00 mtr	on request	on request	on request	on request	on request	

# CEPRO SWIVEL ARM HEAVY DUTY 400CM

Swivel arm, maximum length 4 meter, double girder made from rectangular tube 50 x 50mm. This arm is fitted with a hinge in a block bearing with and a mechanical lock. An assembly plate for fixing the arm to a column or pole is included.

82.10.51.0400



- 1. Choose the type of separation; curtains or strip (2 or 3 mm)
- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation. Details on page 63.

	Curtain			Strips 300 x 2 mm			Strips 300 x 3 mm		
82.10.51	Heigth under beam			Heigth under beam			Heigth under beam		
Swivel arm	2,05 mtr	2,55 mtr	3,05 mtr	2,05 mtr	2,55 mtr	3,05 mtr	2,05 mtr	2,55 mtr	3,05 mtr
length 400cm	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.03.0300 160x160x6mm H=3,00 mtr	83.20.03.0350 160x160x6mm H=3,50 mtr	83.20.03.0400 160x160x6mm H=4,00 mtr	83.20.03.0300 160x160x6mm H=3,00 mtr	83.20.03.0350 160x160x6mm H=3,50 mtr	on request




# **CEPRO SWIVEL ARMS**

#### CEPRO TELESCOPIC SWIVEL ARM

This swivel arm is fitted with a telescope. The hinge of the arm is fitted with an adjustable brake. The swivel arm can be used with both strips and curtains, but is not suitable for heavy loads like a wire-box.

200cm version	82.10.25.2000
250cm version	82.10.25.2500
300cm version	82.10.25.3000
350cm version	82.10.25.3500
400cm version	82.10.25.4000



- 2. Choose the required heigth of the separation
- 3. Then you will find the suitabe pole for this arm and separation.



	Curtain		Strips 300 x 2 mm			Strips 300 x 3 mm			
	Heigth under beam			Heigth under beam			Heigth under beam		
	2,80 mtr	3,30 mtr	3,80 mtr	2,80 mtr	3,30 mtr	3,80 mtr	2,80 mtr	3,30 mtr	3,80 mtr
82.10.25.0200 swivel arm length 200cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.10.02.0400 80x80x3mm H=4,00 mtr	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.20.01.0400 100x100x4mm H=4,00 mtr	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.01.0350 100x100x4mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr
82.10.25.0300 swivel arm length 300cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.10.02.0400 80x80x3mm H=4,00 mtr	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr
82.10.25.0400 swivel arm length 400cm	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.01.0350 100x100x4mm H=3,50 mtr	83.10.01.0400 100x100x4mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	on request	on request	on request

#### CEPRO SWIVEL JOINT ARM - BASIC PART

Foldable swivel arm, with 2 joints. The first part has a adjustable brake system. This swivel arm can be extended with parts of 60cm, with a maximum length of 211cm. This product is finished with a grey (RAL 7035) powdercoating.

82.10.30.900	5 Mounting plate	piece
82.10.17.02	Basic part	piece
82.10.17.03	Extention part	piece
82.10.17.04	Z-support for swivel arm	piece
82.10.15	Tube swivel arm	piece

1. Choose the type of separation; curtains or strip (2 or 3 mm)

<ul><li>2. Choose the required heigth of the separation</li><li>3. Then you will find the suitabe pole for this arm and separation. Details on page 63.</li></ul>									
	Curtain			Strips 300 x 2 mm			Strips 300 x 3 mm		
	Heigth under beam			Heigth under beam			Heigth under beam		
	2,20 mtr	2,70 mtr	3,20 mtr	2,20 mtr	2,70 mtr	3,20 mtr	2,20 mtr	2,70 mtr	3,20 mtr
82.10.17.0921 swivel arm length 300cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.10.02.0400 80x80x3mm H=4,00 mtr	83.20.01.0300 100x100x4mm H=3,00 mtr	83.20.01.0350 100x100x4mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr
82.10.17.1521 swivel arm length 350cm	83.10.02.0300 80x80x3mm H=3,00 mtr	83.10.02.0350 80x80x3mm H=3,50 mtr	83.20.01.0400 100x100x4mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	83.20.02.0400 120x120x5mm H=4,00 mtr	83.20.02.0300 120x120x5mm H=3,00 mtr	83.20.02.0350 120x120x5mm H=3,50 mtr	on request
82.10.17.2121 swivel arm	83.20.01.0300 100x100x4mm	83.20.01.0350 100x100x4mm	83.20.01.0400 100x100x4mm	83.20.02.0300 120x120x5mm	83.20.02.0350 120x120x5mm	83.20.02.0400 120x120x5mm	83.20.02.0300 120x120x5mm	on request	on request

H=3,50 mtr

H=4,00 mtr

H=3,00 mtr

H=3,00 mtr

length 400cm

H=3,00 mtr

H=3,50 mtr

H=4,00 mtr

## CONSTRUCTION Poles & columns

# CEPRO POLES & COLUMNS

## SET FOR FIXING RAIL UNDER SWIVEL ARM

Standard set for fixing a tube 33.7mm Ø under a swivel arm 82.10.30 + 82.10.17

80.15.02

Standard set for fixing a tube 33.7mm Ø under a swivel arm 82.10.36 + 82.10.45 + 82.10.50 + 82.10.51

80.15.01

Supports are galvanized.





# SET FOR FIXING RAIL UNDER SWIVEL ARM

Standard set for fitting rail 30 x 35mm under a swivel arm 82.10.45 + 82.10.50 + 82.10.51

80.15.03

Standard set for fixing a rail 30 x 35mm under a swivel arm 82.10.30 + 82.10.17

80.15.10

Supports are galvanized.



80.15.10

# 80.15.03

#### TAG WITH RUNNER

Tag with swivel for fitting hoses into rail system, including runner and snaphook. Tag is made from nylon.

80.10.05



#### FIXING SET FOR WIRE-BOX

Set for fitting wire-box under a swivel arm, incl. runners, heavy-duty hook and chain with grip maximum load 25kg.

82.01.02





# CEPRO POLES & COLUMNS

#### CEPRO POLE - 50X50X2MM


Pole, with a steel pole 50 x 50 x 2mm and a footplate 110 x 110 x 8mm.

This product is finished with a grey (RAL 7035) powder coating.

 Height 225cm
 83.10.01.0225

 Height 250cm
 83.10.01.0250

 Height 300cm
 83.10.01.0300



#### CEPRO POLE 300CM

Poles. Finished with a grey (RAL 7035) powder coating.

#### Profile 80x80x3mm, footplate 300x300x10mm

Height 225cm	83.10.02.0225
Height 250cm	83.10.02.0250
Height 300cm	83.10.02.0300
Height 350cm	83.10.02.0350
Height 400cm	83.10.02.0400

#### Profile 100x100x4mm, footplate 500x500x15mm

 Height 300cm
 83.20.01.0300

 Height 350cm
 83.20.01.0350

 Height 400cm
 83.20.01.0400

#### Profile 120x120x5mm, footplate 500x500x15mm

 Height 300cm
 83.20.02.0300

 Height 350cm
 83.20.02.0350

 Height 400cm
 83.20.02.0400

#### Profile 160x160x6mm, footplate 500x500x15mm

 Height 300cm
 83.20.03.0300


 Height 350cm
 83.20.03.0350

 Height 400cm
 83.20.03.0400



# **CONSTRUCTION**Rail system

# CEPRO RAIL SYSTEM

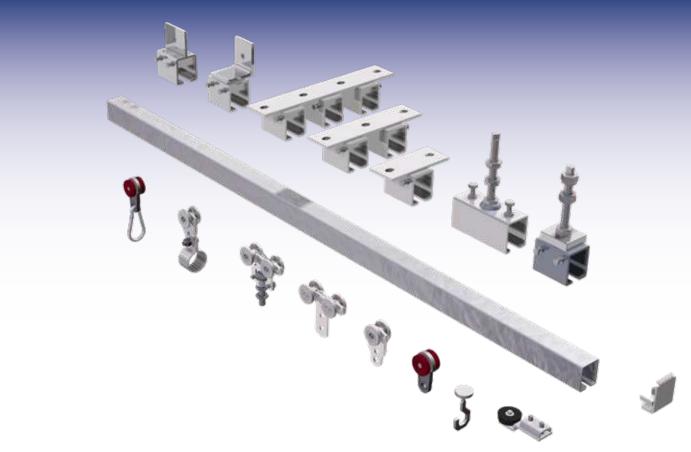


#### **RAIL SUPPORT**

Rail support with long bolt M10 for rail 30 x 35mm

86.10.02






#### **RAIL CONNECTOR**

Rail connector with long bolt M10. For rail 30 x 35mm

86.10.03






## **CEILING CONNECTOR**

Ceiling rail connector for single rail 30 x 35mm

86.10.20





# CONSTRUCTION Rail system




# **CEPRO RAIL SYSTEM**

#### **CEILING CONNECTOR**

Ceiling rail connector for double rail 30 x 35mm

86.10.21






#### **CEILING CONNECTOR**

Ceiling rail connector for triple rail 30 x 35mm

86.10.22





#### **WALL CONNECTOR**

Wall rail connector for rail 30 x 35mm

86.10.15






#### **RAIL SUPPORT**

Rail support for strengthening rail with metal strip.

86.10.25






#### **RAIL 30X35 MM**

Rail 30 x 35mm per running meter, maximum length 6 meter.

86.10.00

For logistical reasons we advise the shipment of rail in bundles or in maximum length of 3 meters.





#### **RAILBEND**

Rail 90° elbow, radius 500mm, for rail 30 x 35mm

86.10.01







# **CONSTRUCTION**Rail system


# CEPRO RAIL SYSTEM

#### **RUNNER PLASTIC**

Two wheel runner plastic, for rail 30 x 35mm. Suitable for curtains. Load capacity 5kg.

86.10.10






#### **RUNNER METAL**

Two wheel runner metal, for rail 30 x 35mm. Load capacity 10kg.

86.10.11






#### **RUNNER METAL**

Four wheel runner metal, for rail 30 x 35mm. Load capacity 25kg.

86.10.13






#### **RUNNER METAL**

Four wheel runner metal, for rail 30 x 35mm. With threaded end M10 bolt. For rail 30 x 35mm.

Load capacity 40kg.

86.10.17






#### **SNAP HOOK**

Snap hook metal, to be used in combination with a runner to make a curtain separation slideable.

10.48.30






#### **SLIDE HOOK**

Slide hook plastic, for fixing a curtain into a rail 30 x 35mm. Only when not used frequently.





10.48.60




# **CEPRO RAIL SYSTEM**

#### **ENDPIECE**

End piece for rail 30 x 35mm

86.10.07






#### **RAIL STOP**

Rail stop with buffer for rail 30 x 35mm

86.10.08






#### **WALL SUPPORT**

Wall support for rail support parts 86.10.02 or 86.10.03

86.10.04






#### **CEILING SUPPORT**

Ceiling support for rail support parts 86.10.02 or 86.10.03, directly on to a horizontal surface.

86.10.05






#### **WALL SUPPORT**

Side wall support for connecting a double rail or pipe to a wall or pole.

80.10.01






#### **WALL SUPPORT**

Heavy duty side wall support for connecting a double rail or pipe to a wall or pole.


80.10.02





# CONSTRUCTION Tube system

# **▶ CEPRO TUBE SYSTEM**

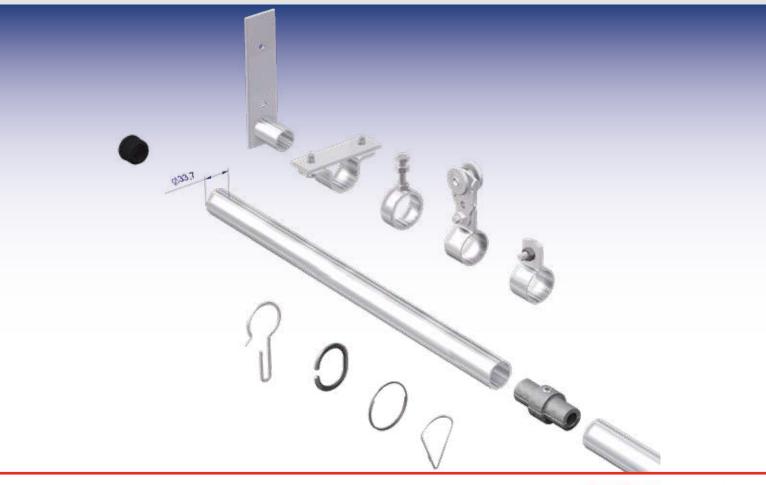


#### **CEILING SUPPORT**

Ceiling support, for connecting pipe max 33.7mm  $\varnothing$  to the wall or ceiling

86.40.10





#### **FLANGE**

Flange, for connecting pipe (33.7mm Ø, 2.9mm wall thickness) to a wall or column

86.40.41






#### **PIPE SUPPORT**

Pipe support with bolt (M8 x 40mm) for pipe max 33.7mm  $\emptyset$ .

86.40.50





# CONSTRUCTION Tube system



# **CEPRO TUBE SYSTEM**


#### **TUBE**

Pipe 33.7mm Ø, 2.5mm wall thickness per running meter, maximum length 6 meter

86.40.00

For logistical reasons we advise the shipment of tube in bundles or in maximum length of 3 meters.






#### **TUBE CONNECTOR**

Pipe connector for pipe 33.7mm Ø. Only suitable for use next to a support

86.40.30






#### **SUSPENSION RING**

Suspension ring, steel, for pipe max 33.7mm  $\emptyset$  (packed per set of 7 pieces)

10.48.50.0007






#### **SUSPENSION RING**

Suspension ring, plastic, for pipe max 33.7mm Ø.

10.48.40





#### **SUSPENSION HOOK**


Suspension ring, metal, extra large for heavy duty purposes. For pipe max :

Ø 34 mm 10.48.55

Ø 50 mm 10.48.58

Ø 70 mm 10.48.56






#### **SUSPENSION RING**

Stainless steel suspension ring. Ø 58 mm.

10.48.52





# **CONSTRUCTION**Tube system

# CEPRO TUBE SYSTEM

#### **PIPE CLAMP**

Pipe clamp, for pipe 33.7mm  $\emptyset$ . To be used in combination with a runner to make a strip separation slideable.

86.40.20






#### **END CAP**

End cap, for pipe 33.7mm Ø, 2.9mm wall thickness.

86.40.25






#### **WALL SUPPORT**

Wall support for rail support parts 86.10.02 or 86.10.03

86.10.04






#### **CEILING SUPPORT**

Ceiling support for rail support parts 86.10.02 or 86.10.03, directly on to a horizontal surface.

86.10.05






#### **WALL SUPPORT**

Side wall support for conncecting a double rail or pipe to a wall or pole

80.10.01






#### **WALL SUPPORT**

Heavy duty side wall support for connecting a double rail or pipe to a wall or pole

80.10.02





# CONSTRUCTION Cable reel



# CEPRO CABLE REEL

- Quick screening off of the workplace
- Easy to operate
- Cable length 8 meter

- Thickness cable 3mm
- Sturdy metal housing

#### CEPRO CABLE REEL

Cable reel, cable length max. 8 meter, without curtain

82.20.10

- Maximum height curtain 200cm
- Including wall support
- Comes with special tensioning support



#### CEPRO WELDING CURTAIN 140 CM WIDE FOR CABLE REEL

Cepro Orange-CE	H. 160 cm x 140cm	16.15.16
Cepro Orange-CE	H. 180 cm x 140cm	16.15.18
Cepro Orange-CE	H. 200 cm x 140cm	16.15.20
Cepro Green-9	H. 160 cm x 140cm	16.19.16
Cepro Green-9	H. 180 cm x 140cm	16.19.18
Cepro Green-9	H. 200 cm x 140cm	16.19.20
Cepro Green-6	H. 160 cm x 140cm	16.16.16
Cepro Green-6	H. 180 cm x 140cm	16.16.18
Cepro Green-6	H. 200 cm x 140cm	16.16.20
Cepro Bronze-CE	H. 160 cm x 140cm	16.17.16
Cepro Bronze-CE	H. 180 cm x 140cm	16.17.18
Cepro Bronze-CE	H. 200 cm x 140cm	16.17.20

EN ISO 25980 APPROVED



#### SUSPENSION RING

Stainless steel suspension ring for curtain. Ø 58mm.

10.48.52



# Protecting people

We protect people and the surrounding area from danger by setting up safe welding and grinding sites.

Solid operational management also means working to protect your employees and the surrounding area from danger. At CEPRO, we believe sharing knowledge about legal safety requirements forms the cornerstone of a productive business relationships and long-term partnership.

#### Reliable quality and service in safety

This allows us to combine all the knowledge and expertise found in today's sector in our products, services and processes. We treat every request with due care and attention and work to tailor our solutions to the individual requirements of the client or end user. And throughout, we leave nothing to chance. Working together with our client, and together with our partners. We believe that continuously investing in knowledge, training and relationships is the best guarantee for consistent and dependable quality and solid service in safety that complies with international regulations. It's what has made CEPRO the global market leader in its sector.

#### Happy in your job

When it comes to safety and job satisfaction, only the best is good enough for our own people too. After all, whether or not you are happy in your job depends to a large extent on how secure and satisfied you feel as an employee. When our employees feel happy, this contributes to their personal health and productivity. And this in turn has a positive impact on customer satisfaction.

#### **CEPRO International B.V.**

Postal adress: Parallelweg 38 5121 LD Rijen, Netherlands

Visiting adress: Parallelweg 38 5121 LD Rijen, Netherlands

Warehouse adress: Parallelweg 40 5121 LD Rijen, Netherlands



www.cepro.eu

Telephone:

Sales Export +31 (0)161 23 01 16

Sales Benelux +31 (0)161 22 64 72

Finance & Administration Finance & Administration +31 (0)161 22 35 11

Warehouse & Logistics +31 (0)161 23 18 28

E-mail:

General info@cepro.eu

Sales

sales@cepro.eu

fa@cepro.eu

Warehouse & Logistics logistics@cepro.eu